

Stainless Steel Every Time

PRODUCT CATALOG




(Page Intentionally Left Blank)



PRODUCT CATALOG - TABLE OF CONTENTS

OUTDOOR DRINKING FOUNTAINS	WSF1-1
• OUTDOOR BOTTLE FILLERS	WSF2-1
• <u>OUTDOOR SHOWERS</u>	WSF3-1
• WATERLESS TOILETS	WSF4-1
• WATERLESS URNIALS	WSF5-1
OUTDOOR HAND SANITIZER STATION	WSF6-1
OUTDOOR FRONT APPROACH DRINKING FOUNTAINS	WSF7-1
• OUTDOOR FRONT APPROACH BOTTLE FILLERS	WSF8-1

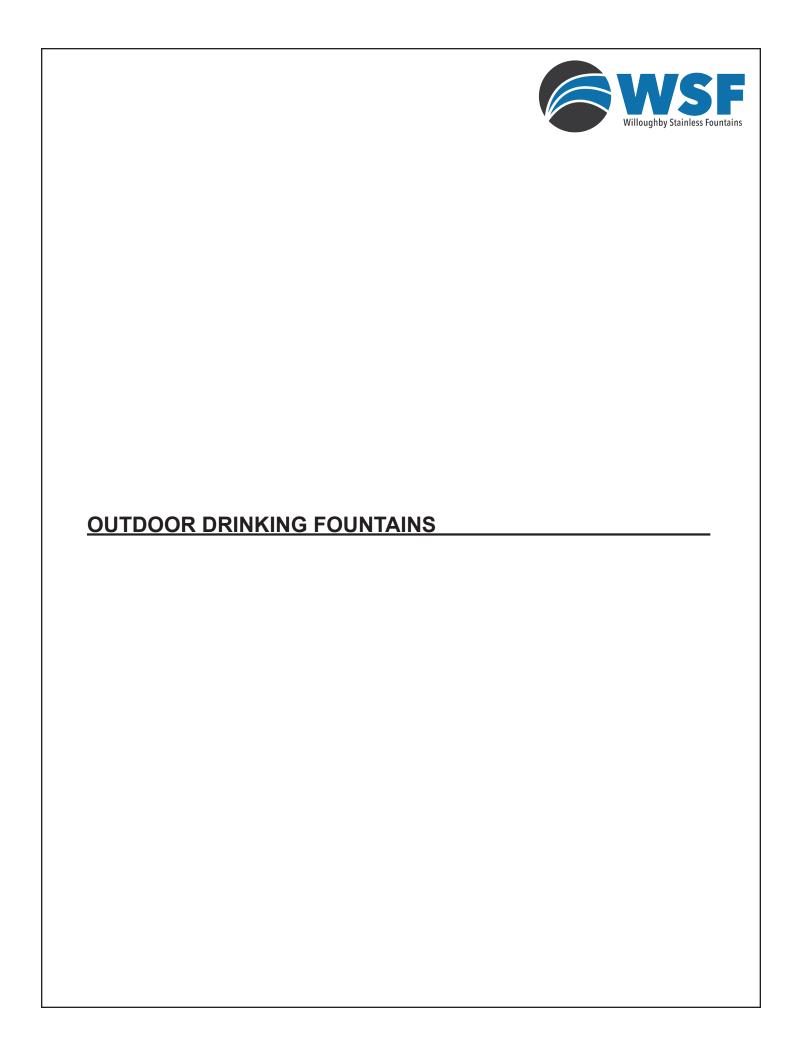

WODF-1 Series Outdoor Drinking Fountain






WODF-1



WODF-1-HC



WODF-1-PET



WARNING: Cancer and Reproductive Harm
- www.P65Warnings.ca.gov

Recommended Specifications

Willoughby Model **WODF-1** outdoor drinking fountain is a single-level, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange.

Fountain shall have a high-polished, 18 GA. stainless steel bowl with anti-rotation, anti-squirt, solid stainless steel bubbler. Bubbler shall be activated by a pedestal-mounted solid stainless steel push button assembly, which controls a lead-free, self-closing valve.

Push button shall require less than 5 lbs. of force to operate. Push button shall be adjustable to ensure adequate flow without being wasteful. **WODF-1** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9 requirements.

Fountain is available in an ADA configuration that shall meet American Disabilities Act of 2010 (ADA) compliance requirements; see option (HC) on the following page.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.

Standard Features

- * Heavy duty Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowl
- * Solid stainless steel, anti-rotation bubbler
- * Serviceable mesh strainer on inlet water supply
- * Heavy-duty main column access panel
- * Resistant to sunlight, heat and vandalism
- * Stainless steel adjustable push button
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WODF-1 outdoor drinking fountain in Silver color Use the following Willoughby Model Number: **WODF-1-SL**

visit our website at www.willoughbystainlessfountains.com


5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065


MADE IN THE U.S.A.

1.) Outdoor Drin	king Fountain Type:	3.) Colors	s (select one):
■ WODF-1	Single-bowl Outdoor Drinking Fountain	SL	Silver
		🔲 G	Green
2.) Options:		☐ R	Red
☐ HC	Adult ADA Compliant Single-bowl Fountain	🔲 BL	Blue
□ PET	Pet Single-bowl Fountain		Orange
316-1	316 Stainless Steel Body, Single	□ ∨	Violet
☐ CAR-10-1	Surface Carrier, Single (Including mounting hardware)	☐ Y	Yellow
☐ CAR-10-2	Surface Carrier, Double , Used With Pet Bowl Only	BR	Brown
	(Including mounting hardware)	BK	Black
☐ SOV	Shut Off Valve	BE	Beige
☐ SCV	Seasonal Bowl Cover (1)	■ W	White
☐ JF/FW	Jug Filler / Foot Wash	YG	Yellow Green
☐ HBE	Hose Bibb Exposed	LBL	Light Blue
☐ HBLD	Recessed Hose Bibb w/ Lock Door	☐ GT	Graphite (Textured)
☐ HH	Hose / Leash Hanger	■ MTW	Matte White
■ WSFMK4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)		
■ WSFMK6	6 Bolt Hole Mounting Kit, Used With Pet Bowl Only		
	(Not req'd with Carrier option)		
	A (() D	D 1	2
Approved For N	Manufacturing By:	Date:	Company:

Wall Thickness: Wall Type:

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

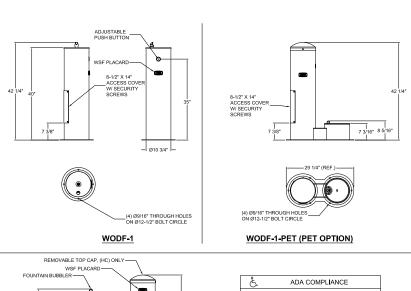




WODF-1-HC (ADA OPTION)

FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD. INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS ANDIOR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.



WODF-2 Series Outdoor Drinking Fountain









Recommended Specifications

Willoughby Model WODF-2 outdoor drinking fountain is a dual-level, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange.

Fountain shall have high-polished, 18 GA. stainless steel bowls with anti-rotation, anti-squirt, solid stainless steel bubblers. Bubblers shall be activated by pedestal mounted solid stainless steel push button assemblies, which control lead-free, self-closing valves.

Push buttons shall require less than 5 lbs. of force to operate. Push buttons shall be adjustable to ensure adequate flow without being wasteful. WODF-2 fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSI A117.1. Fixtures in (HC) and (CHD) configurations shall meet American Disabilities Act of 2010 (ADA) compliance requirements.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.


Standard Features

- * Adult ADA and Child (JR.) ADA compliant fixture configurations available
- * Heavy duty Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowls
- * Solid stainless steel, anti-rotation bubblers
- * Serviceable mesh strainer on inlet water supply
- * Heavy-duty main column access panel
- * Resistant to sunlight, heat and vandalism
- * Stainless steel adjustable push buttons
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WODF-2 outdoor drinking fountain with Child-height (JR. ADA) bowl, in Green color

Use the following Willoughby Model Number: WODF-2-CHD-G





WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov


visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street • Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



1.) Outdoor Drinki	ng Fountain Type:	4.) Colors	s (select one):
■ WODF-2	Two-bowl Outdoor Drinking Fountain	☐ SL	Silver
		☐ G	Green
2.) Bowl Height (o	ther than main column bowl):	☐ R	Red
☐ HC	Adult ADA Compliant	□ BL	Blue
CHD	Child (JR. ADA Compliant)		Orange
PET	Pet		Violet
		☐ Y	Yellow
3.) Options:		BR	Brown
316-2	316 Stainless Steel Body, Double	BK	Black
CAR-10-1	Surface Carrier, Single (Including mounting hardware)	BE	Beige
CAR-10-2	Surface Carrier, Double , Used With Pet Bowl Only	□ W	White
	(Including mounting hardware)	YG	Yellow Green
■ SOV	Shut Off Valve	LBL	Light Blue
☐ SCV	Seasonal Bowl Covers (2)	☐ GT	Graphite (Textured)
□ JF/FW	Jug Filler / Foot Wash	■ MTW	Matte White
☐ HBE	Hose Bibb Exposed		
☐ HBLD	Recessed Hose Bibb w/ Lock Door		
☐ HH	Hose / Leash Hanger		
■ WSFMK4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)		
■ WSFMK6	6 Bolt Hole Mounting Kit , Used With Pet Bowl Only		
	(Not req'd with Carrier option)		
Approved For M	lanufacturing By:	Date:	Company:
Wall Thickness:			

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.





BUBBLER WSF PUSH BUTTON **PLACARD** 40" 42 1/2" 30 1/2" 28" VANDAL RESISTANT S/S BOTTOM ACCESS PANEL Ø10 3/4" —

WODF-2-CHD

BUBBLER -

BUBBLER **PUSH BUTTONS** 0 PLACARD 42 1/2" 40" BUBBLER WODF-2-PET






PUSH BUTTON

WODF-2-CHD

WODF-2-PET

Ł.	ADA COMPLIANCE

FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD. INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.




5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



WODF-3 Series Outdoor Drinking Fountain





WODF-3-HC-CHD


Recommended Specifications

Willoughby Model WODF-3 outdoor drinking fountain is a triple-level, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange.

Fountain shall have high-polished, 18 GA. stainless steel bowls with anti-rotation, anti-squirt, solid stainless steel bubblers. Bubblers shall be activated by pedestal mounted solid stainless steel push button assemblies, which control lead-free, self-closing valves.

Push buttons shall require less than 5 lbs. of force to operate. Push buttons shall be adjustable to ensure adequate flow without being wasteful. WODF-3 fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSIA117.1. Fixtures in (HC) and (CHD) configurations shall meet American Disabilities Act of 2010 (ADA) compliance requirements.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.



Standard Features

- * Adult ADA and Child (JR.) ADA compliant fixture configurations available
- * Heavy duty Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowls
- * Solid stainless steel, anti-rotation bubblers
- * Serviceable mesh strainer on inlet water supply
- * Heavy-duty main column access panel
- * Resistant to sunlight, heat and vandalism
- * Stainless steel adjustable push buttons
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WODF-3 outdoor drinking fountain with Adult ADA and Child-height (JR. ADA) bowls, in Red color

Use the following Willoughby Model Number: WODF-3-HC-CHD-R



WODF-3-CHD-PET (REAR PET LOCATION)

WARNING: Cancer and Reproductive Harm


- www.P65Warnings.ca.gov



visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

1.) Outdoor Drin	king Fountain Type:	4.) Colors	(select one):
☐ WODF-3	Three-bowl Outdoor Drinking Fountain	☐ SL	Silver
		☐ G	Green
2.) Bowl Height (other than main column bowl, select two):	☐ R	Red
☐ HC	Adult ADA Compliant	☐ BL	Blue
CHD	Child (JR. ADA Compliant)	<u> </u>	Orange
PET	Pet Bowl	□ v	Violet
	☐ Side ☐ Rear	_ Y	Yellow
		☐ BR	Brown
3.) Options:		□ вк	Black
☐ 316-3	316 Stainless Steel Body, Triple	□ BE	Beige
CAR-10-1	Surface Carrier, Single (Including mounting hardware)	□w	White
☐ CAR-10-2	Surface Carrier, Double, Used With Pet Bowl Only	☐ YG	Yellow Green
_	(Including mounting hardware)	☐ LBL	Light Blue
☐ SOV	Shut Off Valve	☐ GT	Graphite (Textured)
SCV	Seasonal Bowl Covers (3)	☐ MTW	Matte White
☐ JF/FW Jug Fill	. ,	_	
HBE	Hose Bibb Exposed		
HBLD	Recessed Hose Bibb W/Lock Door		
□ нн	Hose / Leash Hanger		
☐ WSFMK4	4 Bolt Hole Mounting Kit (Not reg'd with Carrier option)		
☐ WSFMK6	6 Bolt Hole Mounting Kit , Used With Pet Bowl Only		
_	(Not reg'd with Carrier option)		
	(·····		
Approved For	Manufacturing By:	_ Date:	Company:
	ss: Wall Type:		

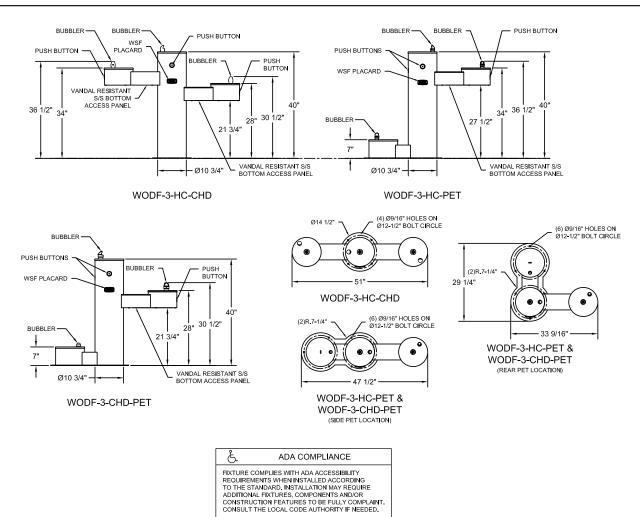

visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065




VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN

WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

WODF-1WM Series
Wall Mounted
Outdoor Drinking Fountain



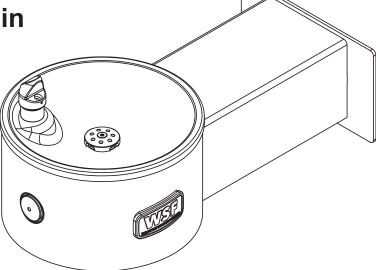

Recommended Specifications

Willoughby Model **WODF-1WM** wall mounted outdoor drinking fountain is a single-level, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange.

Fountain shall have high-polished, 18 GA. stainless steel bowl with anti-rotation, anti-squirt, solid stainless steel bubbler. Bubbler shall be activated by pedestal mounted solid stainless steel push button assembly, which controls a lead-free, self-closing valve.

Push button shall require less than 5 lbs. of force to operate. Push button shall be adjustable to ensure adequate flow without being wasteful. **WODF-1WM** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSIA117.1.

When the drinking fountain bowl is mounted at an appropriate height (34" max A.F.F. for Adult ADA, 31" max A.F.F. for JR. ADA), it shall meet American Disabilities Act of 2010 (ADA) compliance requirements.

Standard Features

- * Adult ADA or Child (JR.) ADA compliant
- * 5/32" wall thickness stainless steel wall column
- * Heavy duty Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowl
- * Solid stainless steel, anti-rotation bubbler
- * Serviceable mesh strainer on inlet water supply
- * Heavy-duty main access panel
- * Resistant to sunlight, heat and vandalism
- * Stainless steel adjustable push button
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WODF-1WM wall mounted outdoor drinking fountain in Blue color Use the following Willoughby Model Number: WODF-1WM-BL



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov




visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065

1.) Outdoor Drink	king Fountain Type:	3.) Colors	s (select one):
■ WODF-1WM	Wall Mounted Outdoor Drinking Fountain) SL	Silver
) G	Green
2.) Options:			R	Red
316-1	316 Stainless Steel Body, Single		BL	Blue
☐ SCV	Seasonal Bowl Cover (1)		0	Orange
			V	Violet
) Y	Yellow
			BR	Brown
			BK	Black
			BE	Beige
			W	White
) YG	Yellow Green
			LBL	Light Blue
] GT	Graphite (Textured)
			MTW (Matte White

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

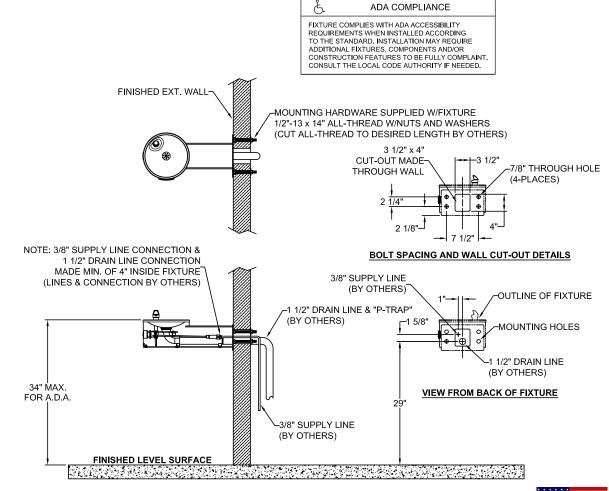

visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065




VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN

WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.



WOPF-1 Series
Outdoor Pet Drinking Fountain



Recommended Specifications

Willoughby Model **WOPF-1** outdoor pet drinking fountain is a single-level, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange.

Fountain shall have high-polished, 18 GA. stainless steel bowl with anti-rotation, anti-squirt, solid stainless steel bubbler. Bubbler shall be activated by pedestal mounted solid stainless steel foot-operated push button assembly, which controls a lead-free, self-closing valve.

Push button shall require less than 5 lbs. of force to operate. Push button shall be adjustable to ensure adequate flow without being wasteful. **WOPF-1** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSI A117.1.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.

Standard Features

- * Heavy duty Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowl
- * Solid stainless steel, anti-rotation bubbler
- * Serviceable mesh strainer on inlet water supply
- * Resistant to sunlight, heat and vandalism
- * Stainless steel adjustable push button
- * Integral slow drain
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WOPF-1 outdoor pet drinking fountain in Orange color Use the following Willoughby Model Number: **WOPF-1-O**



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov




visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065

1.) Outdoor Drin	king Fountain Type:	3.) Colors	s (select one):
■ WOPF-1	Outdoor Pet Drinking Fountain	☐ SL	Silver
		☐ G	Green
2.) Options:		☐ R	Red
316-1	316 Stainless Steel Body, Single	☐ BL	Blue
☐ CAR-10-1	Surface Carrier, Single		Orange
	(Including mounting hardware)	□ ∨	Violet
☐ SOV	Shut Off Valve	☐ Y	Yellow
☐ SCV	Seasonal Bowl Cover (1)	□ BR	Brown
■ WSFMK4	4 Bolt Hole Mounting Kit	□ BK	Black
	(Not req'd with Carrier option)	□ BE	Beige
		□ W	White
		☐ YG	Yellow Green
		☐ LBL	Light Blue
		☐ GT	Graphite (Textured)
		■ MTW	Matte White

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

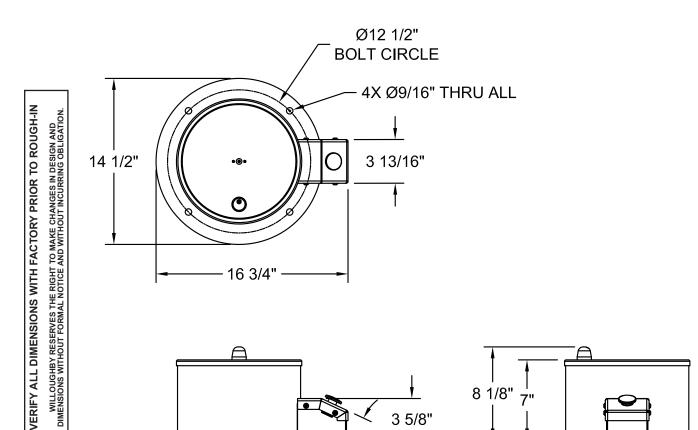

visit our website at www.willoughbystainlessfountains.com

25°


5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065



Ø 10 3/4"

WODF-2WM Series Wall Mounted Two Station Outdoor Drinking Fountain



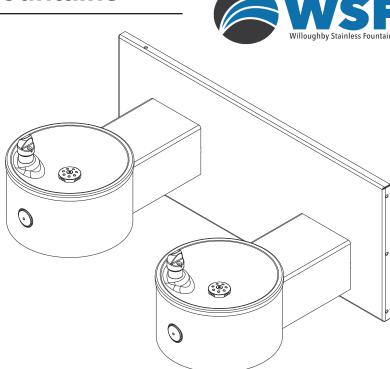

Recommended Specifications

Willoughby Model **WODF-2WM** wall mounted two station outdoor drinking fountain is a dual-level, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 fountain bodies.

Fountains shall have high-polished, 18 GA. stainless steel bowls with anti-rotation, anti-squirt, solid stainless steel bubblers. Bubblers shall be activated by pedestal mounted solid stainless steel push button assemblies, which control lead-free, self-closing valves.

Push button shall require less than 5 lbs. of force to operate. Push button shall be adjustable to ensure adequate flow without being wasteful. **WODF-2WM** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSIA117.1.

When the fixture is correctly mounted, the respective drinking fountain bowls shall meet American Disabilities Act of 2010 (ADA) compliance requirements (34" max A.F.F. for Adult ADA, 31" max A.F.F. for JR. ADA).

Standard Features

- * Adult ADA and Child (JR.) ADA compliant
- * 5/32" wall thickness stainless steel wall columns
- * Heavy duty Type 304 stainless steel 10" Schedule-10 main columns
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowls
- * Solid stainless steel, anti-rotation bubblers
- * Serviceable mesh strainer on inlet water supply
- * Heavy-duty wall mounting frame
- * Resistant to sunlight, heat, and vandalism
- * Stainless steel adjustable push buttons
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WODF-2WM wall mounted two station outdoor drinking fountain in Beige color Use the following Willoughby Model Number: WODF-2WM-BE



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov



visit our website at www.willoughbystainlessfountains.com


5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065

1.) Outdoor Drin	king Fountain Type:	3.) Color	s (select one):
☐ WODF-2WM	Wall Mounted Two Station	☐ SL	Silver
	Outdoor Drinking Fountain	🔲 G	Green
		☐ R	Red
2.) Options:		🔲 BL	Blue
316-2	316 Stainless Steel Body, Double	□ 0	Orange
☐ SCV	Seasonal Bowl Covers (2)	☐ V	Violet
		☐ Y	Yellow
		BR	Brown
		BK	Black
		☐ BE	Beige
		☐ W	White
		🔲 YG	Yellow Green
		LBL	Light Blue
		GT	Graphite (Textured)
		☐ MTW	Matte White

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

FIXTURE COMPLIES WITH ADA ACCESSIBILITY

ADA COMPLIANCE

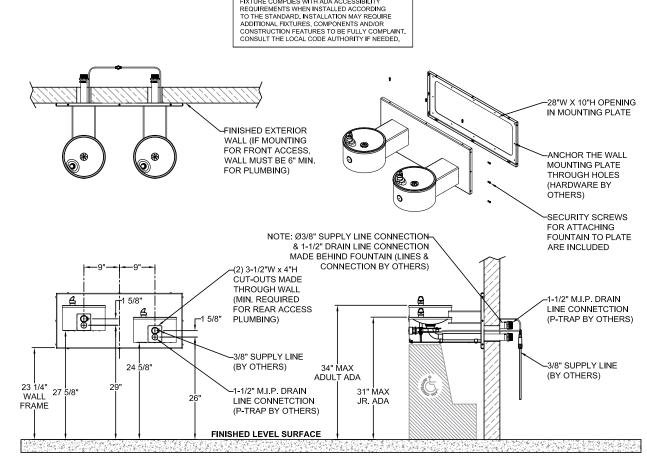

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



WILDOWS Stainless Fountains

WODF-1-HF-FO Series Outdoor Hands-Free Drinking Fountain

Recommended Specifications

Outdoor Hands-Free drinking fountain shall be Willoughby Model No. WODF-1-HF-FO

Willoughby Model **WODF-1-HF-FO** Hands-Free outdoor drinking fountain is a single-level, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange.

Fountain shall have a high-polished, 18 GA. stainless steel bowl with anti-rotation, anti-squirt, solid stainless steel bubbler. Bubbler shall be activated by a solid stainless steel foot operated push button assembly, which controls a lead-free, self-closing valve.

Push button shall require less than 5 lbs. of force to operate. Push button shall be adjustable to ensure adequate flow without being wasteful. **WODF-1-HF-FO** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9 requirements.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.

Standard Features

- * Heavy duty Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowl
- * Solid stainless steel, anti-rotation bubbler
- * Serviceable mesh strainer on inlet water supply
- * Heavy-duty main column access panel
- * Resistant to sunlight, heat and vandalism
- * Stainless steel foot operated push button
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WODF-1-HF-FO outdoor drinking fountain in Silver color Use the following Willoughby Model Number: **WODF-1-HF-FO-SL**




WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov




visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065


© Rev. 4/2023

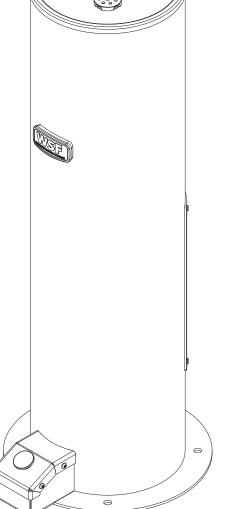

1.) Outdoor Drinking Fountain Type:		3.) Colors	s (select one):
■ WODF-1-HF-FO Outdoor Hands-Free Drinking Fountain		□ SL	Silver
	with Foot Operated Pushbutton	☐ G	Green
		☐ R	Red
2.) Options:		BL	Blue
316-1	316 Stainless Steel Body, Single		Orange
☐ CAR-10-1	Surface Carrier, Single (Including mounting hardware)	□ ∨	Violet
■ SOV	Shut Off Valve	☐ Y	Yellow
☐ SCV	Seasonal Bowl Cover (1)	BR	Brown
☐ JF/FW	Jug Filler / Foot Wash	BK	Black
☐ HBE	Hose Bibb Exposed	BE	Beige
☐ HBLD	Recessed Hose Bibb w/ Lock Door	\square W	White
□ HH	Hose / Leash Hanger	YG	Yellow Green
■ WSFMK4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)	LBL	Light Blue
		□ GT	Graphite (Textured)
		■ MTW	Matte White

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		, ,




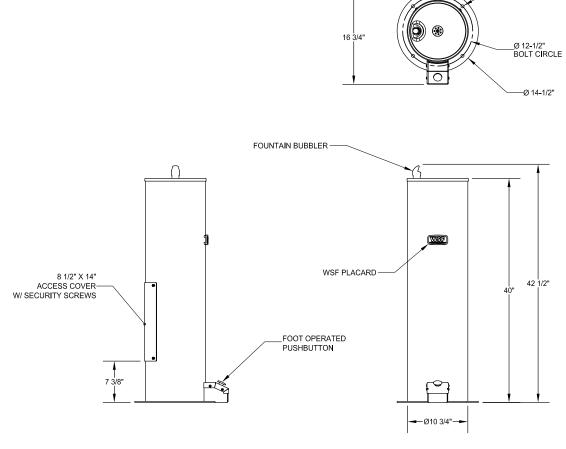

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065



_4XØ 9/16" THRU ALL

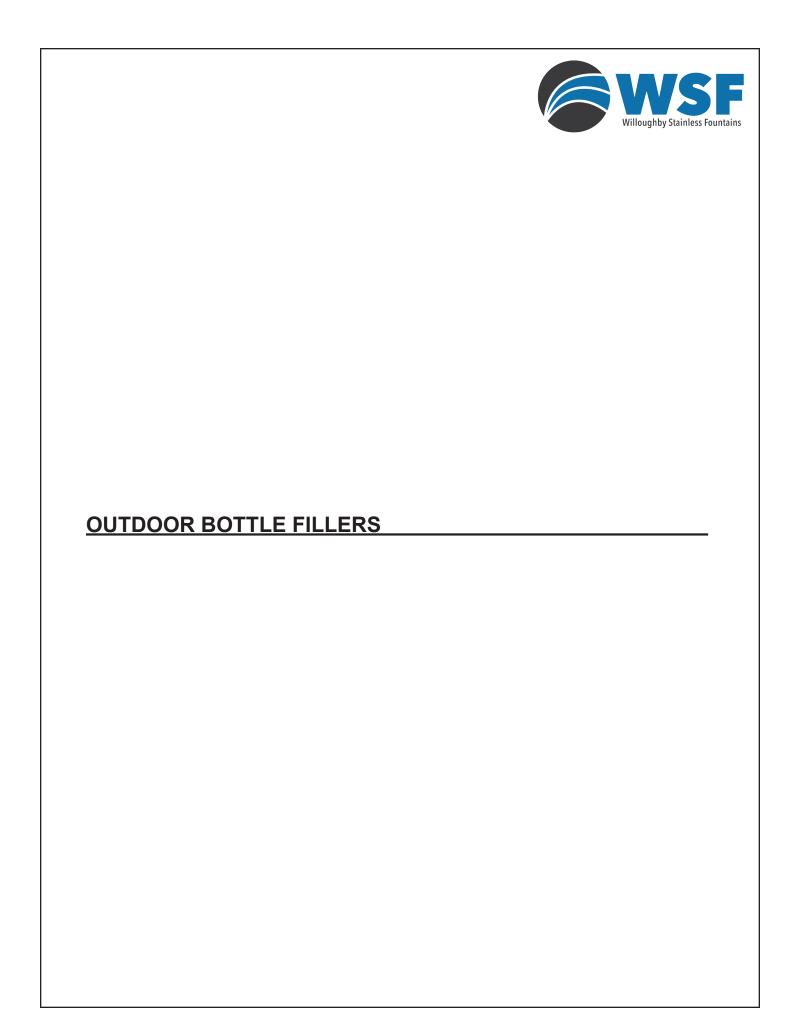



(Page Intentionally Left Blank)



CWBF-1-RPB Series Outdoor Bottle Filler

Recommended Specifications

Outdoor bottle filler shall be Willoughby Model No. CWBF-1-RPB

Model CWBF-1-RPB outdoor bottle filler shall be a single-level, vandal resistant drinking fountain with 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Filler spout shall be activated by a recessed mounted solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve. Pushbutton operation shall require less than 5 lbs. of force.

Model CWBF-1-RPB bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.


Standard Features

- * Simple, vandal-resistant push button
- * Quick, 1-gallon-per-minute fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation filler spout
- * Replaceable in-line charcoal filter on inlet water supply
- * Heavy-duty main column access panels
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Compliant to ADA reach height guidelines
- * Powder coat finish (color options on page 2)


To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-1 outdoor bottle filler with recessed pushbutton, and 316 stainless steel body/cap/flange in Green color,

Use the following Willoughby Model Number: CWBF-1-RPB-316-1 -G




visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

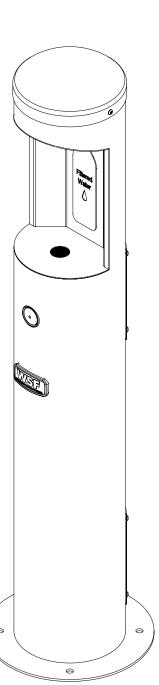

1.)	Outdoor Bo	ottle Filler Type:	3.)	Colors (select one):
	CWBF-1-RF	PB Outdoor Bottle Filler with		SL	Silver
		Recessed Pushbutton		G	Green
				R	Red
2.)	Options:			BL	Blue
	316-1	316 Stainless Steel Body, Single		0	Orange
	CAR-08-1	Surface Carrier, Single (Including mounting hardware)		V	Violet
	JF/FW	Jug Filler / Foot Wash		Υ	Yellow
	HBE	Hose Bibb Exposed		BR	Brown
	HBLD	Recessed Hose Bibb W/Lock Door		BK	Black
	HH	Hose / Leash Hanger		BE	Beige
	SOV	Shut Off Valve		W	White
	WSFMK4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)		YG	Yellow Green
				LBL	Light Blue
				GT	Graphite (Textured)
				MTW	Matte White

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

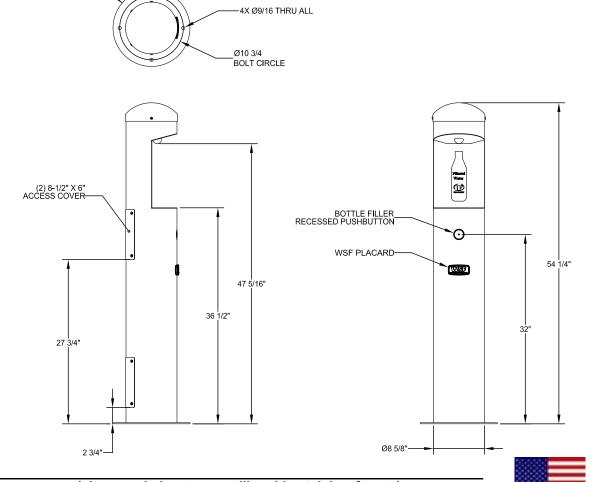

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

Ø 13"

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

© Rev. 5/2023



CWBF-2 Series Outdoor Bottle Filler w/Drinking Fountain

To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-2 outdoor bottle filler with drinking fountain with recessed pushbutton, child drinking fountain bowl height, and 316 stainless steel body/cap/flange in Blue color,

Use the following Willoughby Model Number: CWBF-2-RPB-CHD-316-BL

Standard Features

- * Adult and Child A.D.A. compliant
- * Compliant to ADA reach height guidelines
- * Quick, 1-gallon-per-minute bottle fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation bottle filler spout
- * Solid stainless steel anti-rotation drinking fountain bubbler
- * High polished stainless steel bowl
- * Replaceable in-line charcoal filter on inlet water supply
- * Heavy-duty main column access panels
- * Resistant to sunlight, heat, and vandalism
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Powder coat finish (color options on page 2)

Recommended Specifications

Outdoor bottle filler with drinking fountain shall be Willoughby Model No. CWBF-2- (see Model Number and Options guide for actuator selection).

Model CWBF-2 outdoor bottle filler with drinking fountain shall be a dual-level, vandal resistant drinking fountain with 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Bottle filler spout and fountain bubbler shall be activated by separate recessed mounted solid stainless steel pushbutton assemblies (optional battery operated infrared activation available for bottle filler spout).

Drinking fountain shall have high-polished, 18 gauge stainless steel bowl with antirotation, anti-squirt, solid stainless steel bubblers.


All pushbuttons control lead-free, self-closing valves. Pushbutton operation shall require less than 5 lbs. of force.

Flow controls are used to ensure adequate flow without being wasteful. Bottle filler flows 1.0 GPM, drinking fountain flows 0.5 GPM.

Model CWBF-2 fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSI A117.1 and American Disabilities Act of 2010 requirements.


Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.





CWBF-2-RPB-CHD



CWBF-2-RPB-PET


WARNING: Cancer and Reproductive Harm www.P65Warnings.ca.gov

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065


MADE IN THE U.S.A. **WSF2-3**

1.) Outdoor Bo	ottle Filler Type:			[Options CONTINUED:]
CWBF-2	1 Outdoor Bottle Filler, and 1 Drinking Fountain		SOV	Shut Off Valve
	Bowl		SCV	Seasonal Bowl Cover (1)
			WSFMK4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)
2.) Bottle Filler	Actuator Options (select one):			6 Bolt Hole Mounting Kit, Used With Pet Bowl Only
RPB	Recessed Push Button			(Not reg'd with Carrier option)
□ во	Battery Operated Infrared Sensor			
		5.)	Colors (s	elect one):
3.) Drinking Fo	ountain Bowl Height (select one):		SL	Silver
☐ HC	Adult A.D.A.		G	Green
□ CHD	Child		R	Red
□ PET	Pet		BL	Blue
			0	Orange
4.) Options:			V	Violet
316-2	316 Stainless Steel Body, Double		Υ	Yellow
CAR-10-1	Surface Carrier, Single (Including mounting hardware)		BR	Brown
CAR-10-2	Surface Carrier, Double, Used With Pet Bowl Only		BK	Black
	(Including mounting hardware)		BE	Beige
JF/FW	Jug Filler / Foot Wash		W	White
☐ HBE	Hose Bibb Exposed		YG	Yellow Green
HBLD	Recessed Hose Bibb W/Lock Door		LBL	Light Blue
□ HH	Hose / Leash Hanger		GT	Graphite (Textured)
	[CONTINUED IN NEXT COLUMN:]		MTW	Matte White
Approved Fo	or Manufacturing By:		Date:	Company:
	ess: Wall Type:			





WSF PLACARD 0





CWBF-2-RPB-HC

CWBF-2-RPB-CHD

CWBF-2-RPB-PET

ADA COMPLIANCE FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD. INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.







CWBF-3 Series Outdoor Bottle Filler w/Drinking Fountain

To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-3 outdoor bottle filler with drinking fountain with recessed pushbutton, child drinking fountain bowl height, pet drinking fountain, and 316 stainless steel body/cap/flange in Blue color,

Use the following Willoughby Model Number: CWBF-3-RPB-CHD-PET-316-BL

Standard Features

- * Adult and Child A.D.A. compliant
- * Compliant to ADA reach height guidelines
- * Quick, 1-gallon-per-minute bottle fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation bottle filler spout
- * Solid stainless steel anti-rotation drinking fountain bubbler
- * High polished stainless steel bowl
- * Replaceable in-line charcoal filter on inlet water supply
- * Heavy-duty main column access panels
- * Resistant to sunlight, heat, and vandalism
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Powder coat finish (color options on page 2)

Recommended Specifications

Outdoor bottle filler with drinking fountain shall be Willoughby Model No. CWBF-3-___ (see Model Number and Options guide for actuator selection).

Model CWBF-3 outdoor bottle filler with drinking fountain shall be a triple-level, vandal resistant drinking fountain with 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Bottle filler spout and fountain bubbler shall be activated by separate recessed mounted solid stainless steel pushbutton assemblies (optional battery operated infrared activation available for bottle filler spout).

Drinking fountain shall have high-polished, 18 gauge stainless steel bowl with antirotation, anti-squirt, solid stainless steel bubblers.


All pushbuttons control lead-free, self-closing valves. Pushbutton operation shall require less than 5 lbs. of force.


Flow controls are used to ensure adequate flow without being wasteful. Bottle filler flows 1.0 GPM, drinking fountain flows 0.5 GPM.

Model CWBF-3 fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSI A117.1 and American Disabilities Act of 2010 requirements.


Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.





(SIDE PET LOCATION)



WARNING: Cancer and Reproductive Harm www.P65Warnings.ca.gov


visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street • Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065


WSF2-5

MADE IN THE U.S.A.

1.) Outdoor Bott	le Filler Type:		[Options CONTINUED:]
☐ CWBF-3	1 Outdoor Bottle Filler, and 2 Drinking Fountain	☐ SOV	Shut Off Valve
	Bowls	□ SCV	Seasonal Bowl Covers (2)
		■ WSFMK4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)
2.) Bottle Filler A	ctuator Options (select one):	☐ WSFMK6	- · · · · · · · · · · · · · · · · · · ·
☐ RPB	Recessed Push Button	_	(Not reg'd with Carrier option)
□ во	Battery Operated Infrared Sensor		, ,
_		5.) Colors (se	elect one):
3.) Drinking Fou	ntain Bowl Height (select two):	☐ SL `	Silver
☐ HC	Adult A.D.A.	□ G	Green
☐ SAH	Standing Adult (38" Rim Height)	_ R	Red
☐ CHD	Child	☐ BL	Blue
□ PET	Pet Bowl	□ ○	Orange
	☐ Side ☐ Rear	□ ∨	Violet
		☐ Y	Yellow
4.) Options:		■ BR	Brown
316-3	316 Stainless Steel Body, Triple	□ BK	Black
□ CAR-10-1	Surface Carrier, Single (Including mounting hardware)	■ BE	Beige
☐ CAR-10-2	Surface Carrier, Double, Used With Pet Bowl Only	□ W	White
	(Including mounting hardware)	☐ YG	Yellow Green
□ JF/FW	Jug Filler / Foot Wash	LBL	Light Blue
☐ HBE	Hose Bibb Exposed	□ GT	Graphite (Textured)
☐ HBLD	Recessed Hose Bibb W/Lock Door	■ MTW	Matte White
□ HH	Hose / Leash Hanger		
	[CONTINUED IN NEXT COLUMN:]		
Anna. (2-1-5)	Manufacturing D.	Date	Company
T Abbrosed Fo	or Manufacturing By:	Date: _	Company:





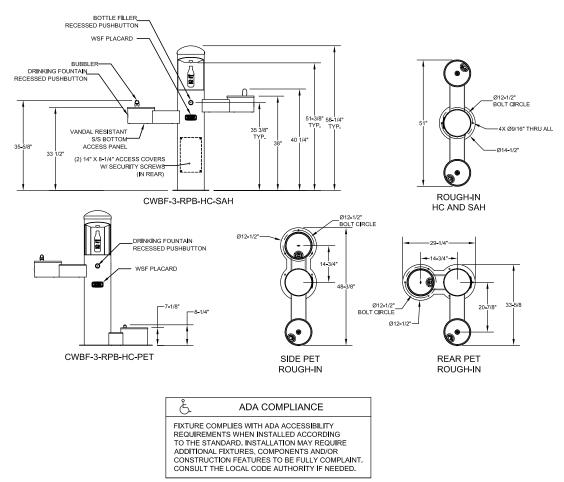

visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065





CWBF-1WM Series Wall Mounted Outdoor Bottle Filler

To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-1WM outdoor bottle filler with recessed pushbutton, and 316 stainless steel body/cap/flange in Green color

Use the following Willoughby Model Number: CWBF-1WM-RPB-316 -G

Standard Features

- * Simple, vandal-resistant pushbutton or optional infrared operation
- * Quick, 1-gallon-per-minute fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 <u>stainless steel</u> 8" Sched. 10 main column and 11 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation filler spout
- * Replaceable in-line charcoal filter on inlet water supply
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Compliant to ADA reach height guidelines

© Rev. 5/2023

* Powder coat finish (color options on page 2)

Recommended Specifications


Wall mounted outdoor bottle filler shall be Willoughby Model No. **CWBF-1WM** ___ (see Model Number and Options guide for actuator selection).


Model **CWBF-1WM** outdoor bottle filler shall be a single-level, vandal resistant drinking fountain with 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Filler spout shall be activated by a recessed mounted solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve (optional battery operated infrared activation available). Pushbutton operation shall require less than 5 lbs. of force.

Model **CWBF-1WM** bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.








(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065


1.)	Outdoor	Bottle Filler Ty	rpe:	4.)	Colors (select one):
	CWBF-1	WM	Outdoor Wall Mounted Single Bottle Filler		SL	Silver
					G	Green
2.)	Actuator	r options (selec	et one):		R	Red
	RPB	Recessed Push	Button		BL	Blue
	ВО	Battery Operate	ed Infrared Sensor		0	Orange
					V	Violet
3.)	Options	s:			Υ	Yellow
	316-1	316 Stainless S	Steel Body, Single		BR	Brown
	SOV	Shut Off Valve			BK	Black
					BE	Beige
					W	White
					YG	Yellow Green
					LBL	Light Blue
					GT	Graphite (Textured)
					MTW	Matte White


Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.



18 5/8"





visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065





CWBF-2WM Series Outdoor Wall Mounted Bottle Filler w/Drinking Fountain


To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-2WM outdoor bottle filler with drinking fountain with recessed pushbutton, and 316 stainless steel body/cap/flange in Blue color

Use the following Willoughby Model Number: CWBF-2WM-RPB-316-2-BL

Standard Features

- * Simple, vandal-resistant pushbutton or optional infrared operation
- * Quick, 1-gallon-per-minute fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 10" Sched. 10 main column and 7 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation filler spout
- * Solid stainless steel anti-rotation drinking fountain bubbler
- * High polished stainless steel bowl
- * Replaceable in-line charcoal filter on inlet water supply
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Compliant to ADA reach height guidelines
- * Powder coat finish (color options on page 2)



Recommended Specifications


Wall mounted outdoor bottle filler shall be Willoughby Model No. CWBF-2WM ____ (see Model Number and Options guide for actuator selection).

Model CWBF-2WM outdoor bottle filler shall be a single-level, vandal resistant drinking fountain with 304 stainless steel 10" Sched. 10 main column and 7 Ga. flange.

Filler spout shall be activated by a recessed mounted solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve (optional battery operated infrared activation available). Pushbutton operation shall require less than 5 lbs. of force.

Model CWBF-2WM bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.





1.) Outdoor B	ottle Filler Type:	4.) Colors	(select one):
CWBF-2WI	M 1 Outdoor Bottle Filler, and 1 Drinking Fountain	☐ SL	Silver
	Bowl	G	Green
		☐ R	Red
2.) Bottle Fille	r Actuator Options (select one):	□ BL	Blue
☐ RPB	Recessed Push Button		Orange
🔲 во	Battery Operated Infrared Sensor	□ ∨	Violet
		☐ Y	Yellow
3.) Options:		■ BR	Brown
316-2	316 Stainless Steel Body, Double	□ BK	Black
☐ SOV	Shut Off Valve	□ BE	Beige
☐ SCV	Seasonal Bowl Cover (1)	□ W	White
		☐ YG	Yellow Green
		LBL	Light Blue
		☐ GT	Graphite (Textured
		■ MTW	Matte White


Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		. ,

11 1/2" 16 7/8"

ADA COMPLIANCE FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD. INSTALLATION MAY REQUIRE

ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.



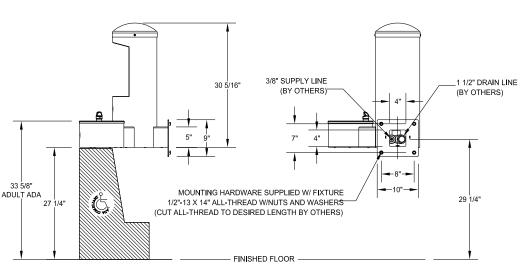

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street • Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065





CWBF-3WM Series Outdoor Wall Mounted Bottle Filler w/Drinking Fountain

To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-3WM outdoor bottle filler with drinking fountain with recessed pushbutton, and 316 stainless steel body/cap/flange in Blue color

Use the following Willoughby Model Number: CWBF-3WM-RPB-316-3-BL

Standard Features

- * Simple, vandal-resistant pushbutton or optional infrared operation
- * Quick, 1-gallon-per-minute fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 10" Sched. 10 main column and 7 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation filler spout
- * Solid stainless steel anti-rotation drinking fountain bubbler
- * High polished stainless steel bowl
- * Replaceable in-line charcoal filter on inlet water supply
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Compliant to ADA reach height guidelines
- * Powder coat finish (color options on page 2)

Recommended Specifications


Wall mounted outdoor bottle filler shall be Willoughby Model No. CWBF-3WM ____ (see Model Number and Options guide for actuator selection).

Model CWBF-3WM outdoor bottle filler shall be a single-level, vandal resistant drinking fountain with 304 stainless steel 10" Sched. 10 main column and 7 Ga. flange.

Filler spout shall be activated by a recessed mounted solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve (optional battery operated infrared activation available). Pushbutton operation shall require less than 5 lbs. of force.

Model CWBF-3WM bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.



WARNING: Cancer and Reproductive Harm
- www.P65Warnings.ca.gov




1.) Outdoor B	ottle Filler Type:	4.) Colors	(select one):
☐ CWBF-3W	M 1 Outdoor Bottle Filler, and 2 Drinking Fountain	☐ SL	Silver
	Bowls	🔲 G	Green
		🔲 R	Red
2.) Bottle Fille	er Actuator Options (select one):	□ BL	Blue
■ RPB	Recessed Push Button		Orange
□ во	Battery Operated Infrared Sensor	□ ∨	Violet
		☐ Y	Yellow
3.) Options:		BR	Brown
316-3	316 Stainless Steel Body, Triple	□ BK	Black
■ SOV	Shut Off Valve	BE	Beige
☐ SCV	Seasonal Bowl Cover (2)	\square W	White
		YG	Yellow Green
		LBL	Light Blue
		☐ GT	Graphite (Textured
		■ MTW	Matte White

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		. ,




WSF2-12



占 ADA COMPLIANCE

FIXTURE COMPLIES WITH ADA ACCESSIBILITY
REQUIREMENTS WHEN INSTALLED ACCORDING
TO THE STANDARD, INSTALLATION MAY REQUIRE
ADDITIONAL FIXTURES, COMPONENTS AND/OR
CONSTRUCTION FEATURES TO BE FULLY COMPLAINT.
CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.

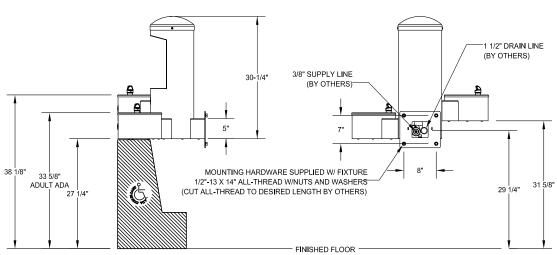

visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065





CWBF-1-HF Series Outdoor Hands-Free Bottle Filler

Recommended Specifications

Outdoor Hands-Free bottle filler shall be Willoughby Model No. **CWBF-1-HF** ____ (see Model Number and Options guide for actuator selection).

Model **CWBF-1-HF** Hands-Free outdoor bottle filler shall be a single-level, vandal resistant bottle filler with 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Filler spout shall be activated by a foot operated solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve. Foot operated pushbutton operation shall require less than 5 lbs. of force (optional battery operated-infrared activation available).

Model **CWBF-1-HF** bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.

Standard Features

- * Simple, vandal-resistant foot operated push button or optional infrared operation
- * Quick, 1-gallon-per-minute fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation filler spout
- * Replaceable in-line charcoal filter on inlet water supply
- * Heavy-duty main column access panels
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Compliant to ADA reach height guidelines
- * Powder coat finish (color options on page 2)

To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-1-HF outdoor hands-free bottle filler with foot operated pushbutton, and 316 stainless steel body/cap/flange in Green color,

Use the following Willoughby Model Number: CWBF-1-HF-316-1-G

WARNING: Cancer and Reproductive Harm
- www.P65Warnings.ca.gov


visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065

MADE IN THE U.S.A.

1.) Outdoor	Bottle Filler Type:	4.)	Colors	(select one):
CWBF-1	-HF Outdoor Hands-Free Bottle Filler		SL	Silver
			G	Green
2.) Actuator	options (select one):		R	Red
☐ FO	Foot Operated Pushbutton (standard)		BL	Blue
🔲 во	Battery Operated Infrared Sensor		0	Orange
			V	Violet
3.) Options	:		Υ	Yellow
316-1	316 Stainless Steel Body, Single		BR	Brown
☐ CAR-08-	1 Surface Carrier, Single (Including mounting hardware)		BK	Black
☐ JF/FW	Jug Filler / Foot Wash		BE	Beige
HBE	Hose Bibb Exposed		W	White
HBLD	Recessed Hose Bibb W/Lock Door		YG	Yellow Green
🔲 НН	Hose / Leash Hanger		LBL	Light Blue
☐ SOV	Shut Off Valve		GT	Graphite (Textured)
☐ WSFMK	4 4 Bolt Hole Mounting Kit (Not req'd with Carrier option)		MTW	Matte White

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		



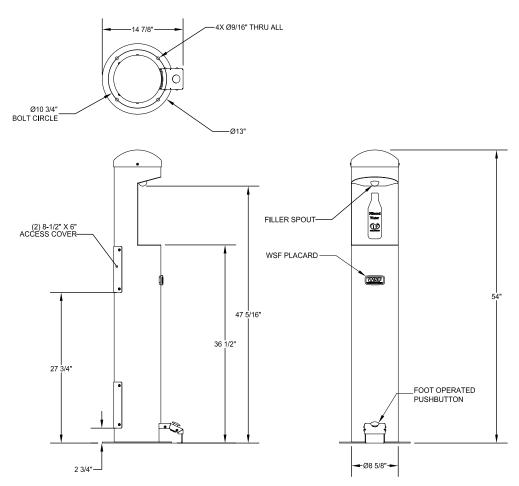


visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065





WOBF-1SM Series Stainless Steel **Surface Mounted Bottle Filler**



Standard Features

Stainless Steel, Surface Mounted, Bottle Filler shall be: Willoughby Model No. WOBF-1SM.

Model WOBF-1SM bottle filler shall be constructed of a vandal resistant 304 stainless steel, with a removable bottom panel.


Filler spout shall be activated by a solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve. Pushbutton operation shall require less than 5 lbs. of force to activate.

Model WOBF-1SM bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Anchoring shall be by wall mounting frame attached to wall. Anchoring hardware is to be provided by others.

Recommended Specifications


- * Simple, vandal-resistant pushbutton
- * Quick, 1-gallon-per-minute fill rate
- * Standard heavy duty type 304 14 Ga. stainless steel
- * Solid stainless steel vandal resistant anti-rotation filler spout
- * Replaceable in-line charcoal filter on inlet water supply
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Compliant to ADA reach height guidelines (Optional cane skirt avaliable for use in circulation path)
- * Removable bottom panel
- * Powder coat finish (color options on page 2)



To specify fixture and options, use the Model Number and Options page.


Example: To specify a WOBF-1SM surface mounted bottle filler with single temp non-metering valve, recessed pushbutton, and in Silver color.

Use the following Willoughby Model Number: WOBF-1SM-RPB-SL




MADE IN THE U.S.A.

1.) Type:			3.) Colors	(select one):
☐ WOBF-	1SM-RPB	Stainless Steel, Surface Mounted,	☐ SL	Silver
		Bottle Filler	☐ G	Green
2.) Option:			☐ R	Red
CS Cane Skirt (Regiured when for use in circulation page 1)		qiured when for use in circulation paths)	□ BL	Blue
	•			Orange
			\Box \lor	Violet
		☐ Y	Yellow	
			□ BR	Brown
			BK	Black
			□ BE	Beige
			\square W	White
			YG	Yellow Green
			LBL	Light Blue
			□ GT	Graphite (Textured)
			■ MTW	Matte White
Approved	For Manufactu	ring By:	Date: _	Company:
Wall Thic	kness:	Wall Type:		



VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

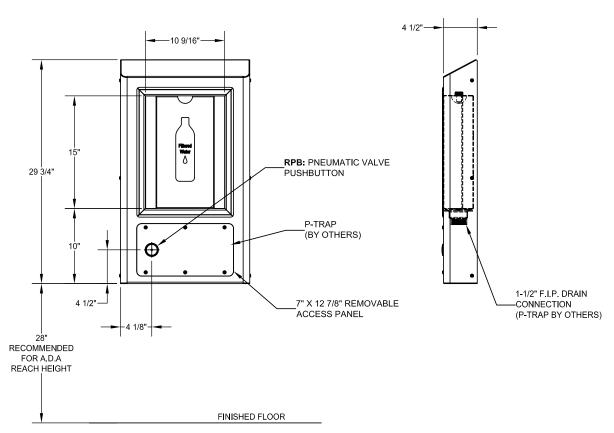

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065





WOBF-1RFM Series Stainless Steel Recessed Front Mounted Bottle Filler

Standard Features


Stainless Steel, Recessed Front Mounted, Bottle Filler shall be: Willoughby Model No. **WOBF-1RFM**.

Model **WOBF-1RFM** bottle filler shall be constructed of a vandal resistant 304 stainless steel, with a removable bottom panel.

Filler spout shall be activated by a solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve. Pushbutton operation shall require less than 5 lbs. of force to activate.

Model **WOBF-1RFM** bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Anchoring shall be by z-clip at the top of the fixture and internal wall mounting holes at the bottom of the fixture. Anchoring hardware is to be provided by others.

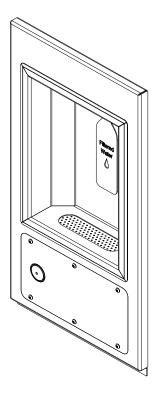


Recommended Specifications

- * Simple, vandal-resistant pushbutton
- * Quick, 1-gallon-per-minute fill rate
- * Standard heavy duty type 304 14 Ga. stainless steel
- * Solid stainless steel vandal resistant anti-rotation filler spout
- * Replaceable in-line charcoal filter on inlet water supply
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Compliant to ADA reach height guidelines
- * Removable bottom panel
- * Powder coat finish (color options on page 2)

To specify fixture and options, use the Model Number and Options page.


Example: To specify a WOBF-1RFM recessed front mounted bottle filler with single temp non-metering valve, recessed pushbutton, and in Silver color.

Use the following Willoughby Model Number: WOBF-1RFM-RPB-SL





1.) Type:		2.) Colors	(select one):
■ WOBF-1RFM-RPB	Stainless Steel, Recessed Mounted,	☐ SL	Silver
	Bottle Filler	☐ G	Green
		☐ R	Red
		☐ BL	Blue
		<u> </u>	Orange
		□ ∨	Violet
		_ Y	Yellow
		☐ BR	Brown
		_ □ BK	Black
		□ BE	Beige
		□ w	White
		☐ YG	Yellow Green
		LBL	Light Blue
		☐ GT	Graphite (Textured)
		☐ MTW	Matte White
Approved For Manufactur	ing By:	Date:	Company:
Wall Thickness:	Wall Type:		

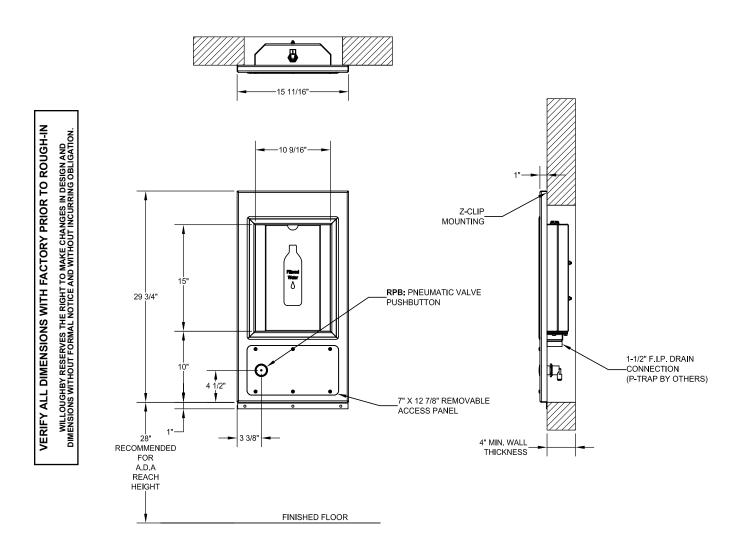

MADE IN THE **U.S.A**.



WOBF-1RM Series Stainless Steel Rear Mounted Bottle Filler

Standard Features


Stainless Steel, Rear Mounted, Bottle Filler shall be: Willoughby Model No. **WOBF-1RM**.

Model WOBF-1RM bottle filler shall be constructed of a vandal resistant 304 stainless steel.

Filler spout shall be activated by a solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve. Pushbutton operation shall require less than 5 lbs. of force to activate.

Model **WOBF-1RM** bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Anchoring shall be by standard 4-point system. \emptyset 1/2" threaded rods, nuts and washers shall be furnished for walls up to 8" thick.

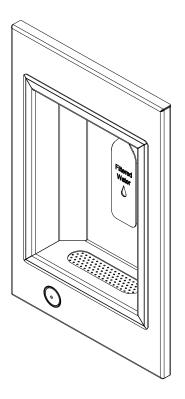


To specify fixture and options, use the Model Number and Options page.

Example: To specify a WOBF-1RM rear mounted bottle filler with single temp non-metering valve, recessed pushbutton, and in Silver color.

Use the following Willoughby Model Number: WOBF-1RM-RPB-SL


Recommended Specifications

- * Simple, vandal-resistant pushbutton
- * Quick, 1-gallon-per-minute fill rate
- * Standard heavy duty type 304 14 Ga. stainless steel
- * Solid stainless steel vandal resistant anti-rotation filler spout
- * Replaceable in-line charcoal filter on inlet water supply
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Compliant to ADA reach height guidelines
- * Powder coat finish (color options on page 2)



MADE IN THE U.S.A.


1.) Type: 2.) Colors (select one): ■ WOBF-1RM-RPB Stainless Steel, Rear mounted, ☐ SL Silver **Bottle Filler □** G Green ☐ R Red BL O Blue Orange Ū ∨ Violet □ Y Yellow □ BR Brown □ вк Black □ BE Beige □ W White ☐ YG Yellow Green ☐ LBL Light Blue ☐ GT Graphite (Textured) ■ MTW Matte White Approved For Manufacturing By: __ Date: _ Company:_ Wall Thickness: _ Wall Type:

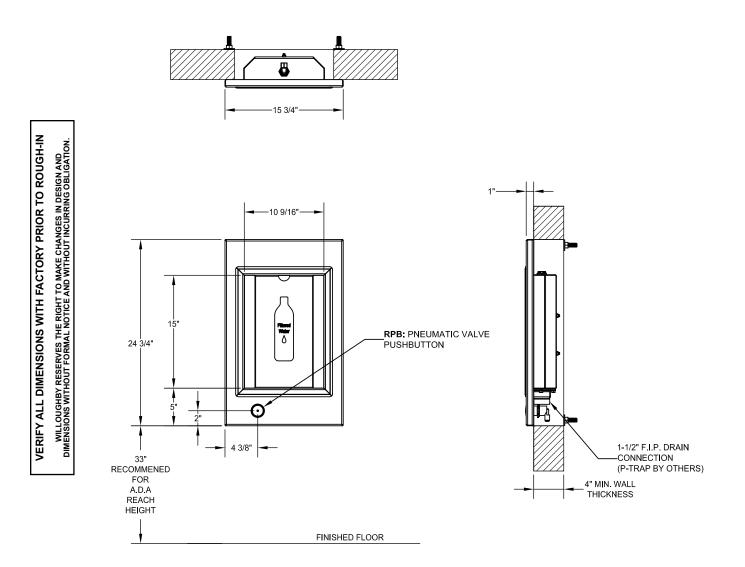

visit our website at www.willoughbystainlessfountains.com
5105 West 78th Street ● Indianapolis, IN. 46268
(317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065

CWBFD-3WM Series Outdoor Wall Mounted Bottle Filler w/Drinking Fountains





To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBFD-3WM outdoor bottle filler with drinking fountain with recessed pushbutton, child drinking fountain bowl height, pet drinking fountain, and 316 stainless steel body/cap/flange in Blue color,

Use the following Willoughby Model Number: CWBFD-3WM-RPB-316-3-BL

Recommended Specifications

Outdoor bottle filler with drinking fountains shall be Willoughby Model No. **CWBFD-3WM-**___ (see Model Number and Options guide for actuator selection).

Model **CWBFD-3WM** outdoor bottle filler with drinking fountain shall be a triple-level, vandal resistant wall mounted drinking fountain with 304 stainless steel 14 Ga. wall plate.

Bottle filler spout and fountain bubbler shall be activated by Separate recessed mounted solid stainless steel pushbutton assemblies (optional battery operated infrared activation available for bottle filler spout).

Drinking fountain shall have high-polished, 18 gauge stainless steel bowl with anti-rotation, anti-squirt, solid stainless steel bubblers.

All pushbuttons control lead-free, self-closing valves. Pushbutton operation shall require less than 5 lbs. of force.


Flow controls are used to ensure adequate flow without being wasteful. Bottle filler flows 1.0 GPM, drinking fountain flows 0.5 GPM.

Model **CWBFD-3WM** fountain shall be lead-free, adhering to ANSI/ NSF 61, Section 9, ANSI A117.1 and American Disabilities Act of 2010 requirements.

Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.

Standard Features

- * Adult A.D.A. compliant
- * Compliant to ADA reach height guidelines
- * Quick, 1-gallon-per-minute bottle fill rate
- Optional marine-grade type 316 <u>stainless steel</u> body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation bottle filler spout
- * Solid stainless steel anti-rotation drinking fountain bubbler
- * High polished stainless steel bowl
- * Replaceable in-line charcoal filter on inlet water supply
- * Resistant to sunlight, heat, and vandalism
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Powder coat finish (color options on page 2)



visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268


(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



© Rev. 12/2022 WSF2-21

1.) Outdoor B	ottle Filler Ty	ype:	5.) Colors (select one):		
☐ CWBFD-3V	VΜ	1 Wall Mounted Outdoor Bottle Filler,	☐ S	SL	Silver
		1 Adult A.D.A. Drinking Fountain Bowl, and	☐ G	}	Green
		1 Drinking Fountain Bowl	🔲 R	₹	Red
			🔲 В	3L	Blue
2.) Bottle Fille	er Actuator C	options (select one):)	Orange
RPB	Recessed F	Push Button	☐ V	/	Violet
🔲 во	Battery Ope	erated Infrared Sensor	☐ Y	′	Yellow
			🔲 В	3R	Brown
3.) Options:			🔲 В	3K	Black
316-3	316 Stainles	ss Steel Body, Triple	🔲 В	3E	Beige
☐ SOV	Shut Off Va	lve	☐ W	V	White
☐ SCV	Seasonal B	owl Covers (2)	□ Y	′G	Yellow Green
				.BL	Light Blue
			☐ G	ЭΤ	Graphite (Textured)
			■ M	/ITW	Matte White

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

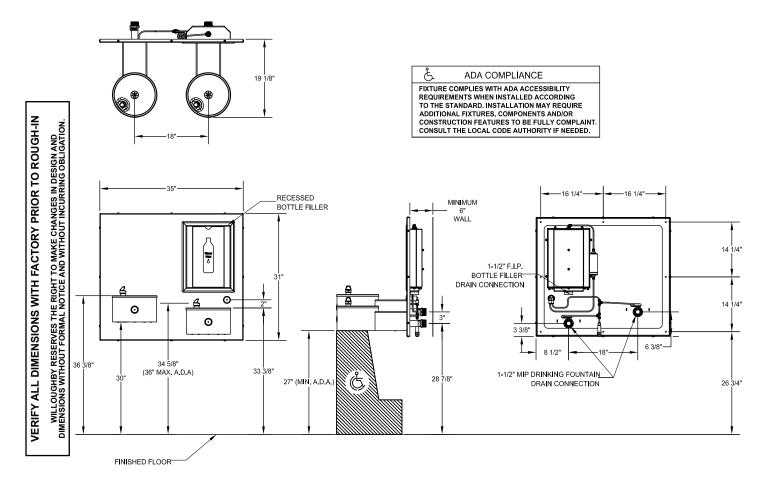



WOBFDF Series
Stainless Steel
ADA Compliant
Rear Mounted
Bottle Filler
w/ Drinking Fountain

Standard Features


Stainless Steel, ADA Compliant, Bottle Filler w/ Drinking Fountain shall be: Willoughby Model No. **WOBFDF**

Model WOBFDF bottle filler shall be constructed of a vandal resistant 304 stainless steel.

Filler spout shall be activated by a solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve. Pushbutton operation shall require less than 5 lbs. of force to activate.

Model **WOBFDF** bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Anchoring shall be by standard 6-point system. \emptyset 1/2" threaded rods, nuts and washers shall be furnished for walls up to 8" thick.




To specify fixture and options, use the Model Number and Options page.

Example: To specify a WOBFDF rear mounted bottle filler with single temp non-metering valve, recessed pushbutton, and in Silver color.

Use the following Willoughby Model Number: WOBFDF-SL

Recommended Specifications


- * Adult A.D.A. compliant
- * Compliant to ADA reach height guidelines
- * Quick, 1-gallon-per-minute bottle fill rate
- * Solid <u>stainless steel</u> vandal resistant anti-rotation bottle filler spout
- * Solid stainless steel anti-rotation drinking fountain bubbler
- * Resistant to sunlight, heat, and vandalism
- * Replaceable in-line charcoal filter on inlet water supply
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Powder coat finish (color options on page 2)



MADE IN THE U.S.A.

1.) Type:		2.) Colors	(select one):
■ WOBFDF	Stainless Steel, ADA Compliant, Rear Mounted,	☐ SL	Silver
	Bottle Filler w/ Drinking Fountain	🔲 G	Green
		🔲 R	Red
		BL	Blue
			Orange
		☐ ∨	Violet
		☐ Y	Yellow
		BR	Brown
		BK	Black
		BE	Beige
		□ W	White
		🔲 YG	Yellow Green
		LBL	Light Blue
		GT	Graphite (Textured)
		■ MTW	Matte White
Approved For N	/Janufacturing By:	Date: _	Company:
Wall Thickness			

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

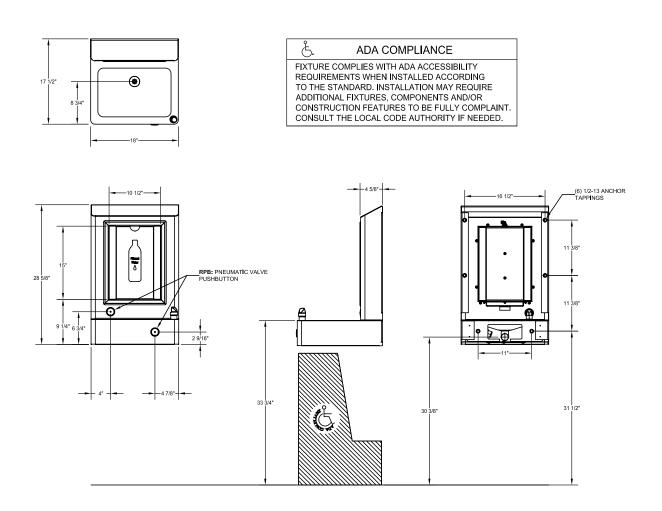





WOBFDF-FA Series
Stainless Steel
ADA Compliant
Front Mounted
Bottle Filler
w/ Drinking Fountain

Standard Features


Stainless Steel, ADA Compliant, Front Mounted Bottle Filler w/ Drinking Fountain shall be: Willoughby Model No. **WOBFDF-FA**

Model **WOBFDF-FA** bottle filler shall be constructed of vandal resistant 304 stainless steel. With a removable bottom shroud.

Filler spout shall be activated by a solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve. Pushbutton operation shall require less than 5 lbs. of force to activate.

Model **WOBFDF-FA** bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Anchoring shall be by wall mounting frame attached to wall. Anchoring hardware is to be provided by others.



Example: To specify a WOBFDF-FA front mounted bottle filler with single temp non-metering valve, recessed pushbutton, and in Silver color.

To specify fixture and options, use the Model Number and Options page.


Use the following Willoughby Model Number: WOBFDF-FA-SL

Recommended Specifications

* Adult A.D.A. compliant

© Rev. 8/2023

- * Compliant to ADA reach height guidelines
- * Quick, 1-gallon-per-minute bottle fill rate
- * Solid <u>stainless steel</u> vandal resistant anti-rotation bottle filler spout
- * Solid stainless steel anti-rotation drinking fountain bubbler
- * Resistant to sunlight, heat, and vandalism
- * Replaceable in-line charcoal filter on inlet water supply
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Powder coat finish (color options on page 2)



MADE IN THE U.S.A.

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065

1.) Type:

■ WOBFDF-FA

Stainless Steel, ADA Compliant, Front Mounted, Bottle Filler w/ Drinking Fountain

2.) Colors (select one):

- ☐ SL Silver ☐ G Green
- Red
- ☐ BL Blue
- □ O Orange□ V Violet
- Yellow
- BR Brown
- □ BK Black□ BE Beige
- W White
- YG Yellow Green
- ☐ LBL Light Blue
- ☐ GT Graphite (Textured)☐ MTW Matte White

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:	<u> </u>	


17 1/2" 8 3/4"




ADA COMPLIANCE

FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD, INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT, CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.





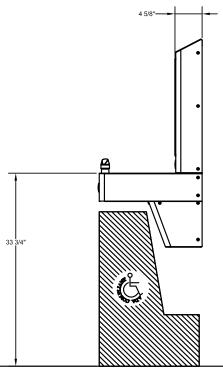

 $visit\ our\ website\ at\ www.willoughby stainless fountains.com$

5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065





CWBF-4ADA Series Outdoor Bottle Filler w/Drinking Fountain

To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-4 outdoor bottle filler with drinking fountain with recessed pushbutton, and 316 stainless steel body/cap/flange in Blue color

Use the following Willoughby Model Number: CWBF-4-RPB-316-BL

Standard Features

- * Adult A.D.A. compliant, Adult standing, and Pet bowls
- * Compliant to ADA reach height guidelines
- * Quick, 1-gallon-per-minute bottle fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation bottle filler spout
- * Solid stainless steel anti-rotation drinking fountain bubbler
- * High polished stainless steel bowl

© Rev. 4/2023

- * Replaceable in-line charcoal filter on inlet water supply
- * Heavy-duty main column access panels
- * Resistant to sunlight, heat, and vandalism
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Powder coat finish (color options on page 2)

Recommended Specifications

Outdoor bottle filler with drinking fountain shall be Willoughby Model No. **CWBF-4ADA-**___ (see Model Number and Options guide for actuator selection).

Model **CWBF-4ADA** outdoor bottle filler with drinking fountain shall be a triple-level, vandal resistant drinking fountain with 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Bottle filler spout and fountain bubbler shall be activated by separate recessed mounted solid stainless steel pushbutton assemblies (optional battery operated infrared activation available for bottle filler spout).

Drinking fountain shall have high-polished, 18 gauge stainless steel bowl with anti-rotation, anti-squirt, solid stainless steel bubblers.


All pushbuttons control lead-free, self-closing valves. Pushbutton operation shall require less than 5 lbs. of force.

Flow controls are used to ensure adequate flow without being wasteful. Bottle filler flows 1.0 GPM, drinking fountain flows 0.5 GPM.

Model **CWBF-4ADA** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSI A117.1 and American Disabilities Act of 2010 requirements.

Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.




visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065

1.) Outdoor Bo	ottle Filler Type:	4.) Colors	(select one):
☐ CWBF-4AD	A 1 Outdoor Bottle Filler, and 3 Drinking Fountain	☐ SL	Silver
	Bowls	☐ G	Green
		☐ R	Red
2.) Bottle Filler	r Actuator Options (select one):	□ BL	Blue
■ RPB	Recessed Push Button		Orange
□ во	Battery Operated Infrared Sensor	□ ∨	Violet
		☐ Y	Yellow
3.) Options:		BR	Brown
316-4	316 Stainless Steel Body, Quadruple	□ BK	Black
☐ CAR-10-2	Surface Carrier, Double (Including mounting hardware)	□ BE	Beige
☐ HBE	Hose Bibb Exposed	□ W	White
☐ HBLD	Recessed Hose Bibb W/Lock Door	☐ YG	Yellow Green
☐ SOV	Shut Off Valve	LBL	Light Blue
☐ SCV	Seasonal Bowl Covers (3)	☐ GT	Graphite (Textured)
■ WSFMK6	6 Bolt Hole Mounting Kit (Not req'd with Carrier option)	■ MTW	Matte White


Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		


6X Ø9/16 THRU






ADA COMPLIANCE FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD, INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.








visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065




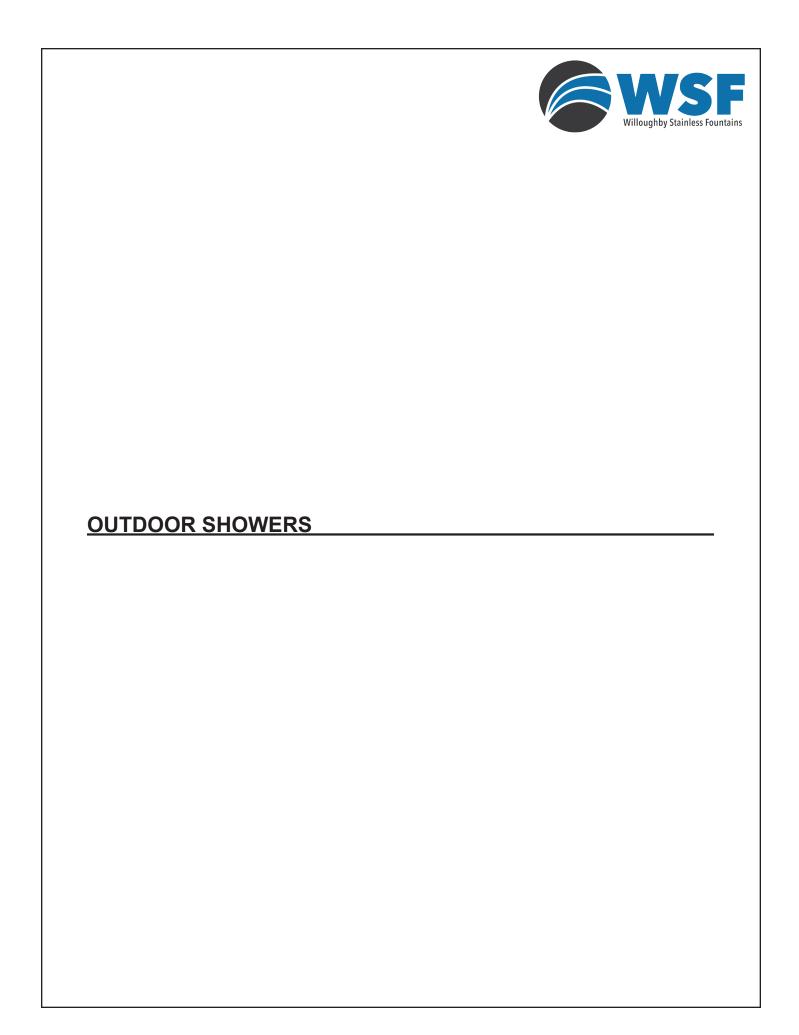



(Page Intentionally Left Blank)

WODS Series Outdoor Shower






To specify fixture and options, use the Model Number and Options page.

Example: To specify a WODS outdoor shower with 4 shower heads, 1 foot shower, 316 stainless steel body / cap / flange, in Violet color

Use the following Willoughby Model Number: WODS-4-1-316-V



Recommended Specifications

WODS-4-1

WODS-4-2

Outdoor shower shall be Willoughby Model No. **WODS-__-** (select number of shower heads and foot showers from table above).

4

2

Model **WODS** outdoor shower shall be vandal resistant with a 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Shower heads and foot showers shall be activated by recessed mounted solid stainless steel push button assemblies controlling lead-free metering and non-metering valves with 1.5 GPM flow. Shower unit is easily winterized by turning off the fixture supply line (shut-off valve by others), disconnecting the flexible supply hoses from the valves, and removing the valves from within the body; all valves are secured using a single-point attachment nut.


Shower heads and optional foot showers shall be Willoughby all-stainless steel (NPS) non-user adjustable shower heads.

Shower unit shall be factory assembled, tested for proper operation and ready for installation by a contractor. Unit to be anchored using 1/2"-13 anchoring bolts (by others).

Shower unit shall have a powder coat finish from the list of colors on the next page.

Optional marine-grade type 316 stainless steel body (main column, flange, and cap) is available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.



MADE IN THE U.S.A.

1.)	Outdoor Show	ver Type:	6.)	Colors	(select one):
	WODS	Outdoor Shower		SL	Silver
				G	Green
2.)	Head Showers	s:		R	Red
	1	One (1) Head Shower		BL	Blue
	2	Two (2) Head Showers		0	Orange
	4	Four (4) Head Showers		V	Violet
				Υ	Yellow
3.)	Foot Showers	:		BR	Brown
	0	No Foot Showers		BK	Black
	1	One (1) Foot Shower		BE	Beige
	2	Two (2) Foot Showers		W	White
				YG	Yellow Green
4.)	Flow Rates:			LBL	Light Blue
	1.5 GPM (Stan	dard)		GT	Graphite (Textured)
				MTW	Matte White
5.)	Options:				
	316-ODS	316 Stainless Steel Body For Outdoor Shower			
	HBE	Hose Bibb Exposed			
	HBLD	Recessed Hose Bibb w/Lock Door			
$\bar{\Box}$.IF	Jug Filler			


Surface Carrier For Outdoor Shower (Including mounting hardware)

-Ø8-5/8"

4 Bolt Hole Mounting Kit (Not req'd with Carrier option)

Ø13"

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		. ,

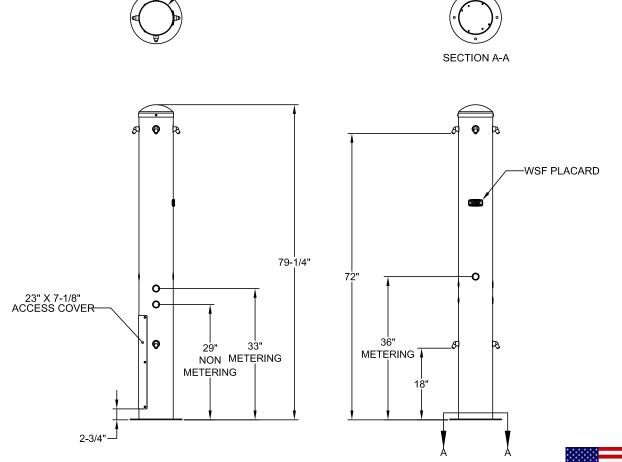

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

4XØ 9/16" THRU ALL -HOLES ON Ø10¾" BOLT CIRCLE

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

CAR-08-1

☐ WSFMK4

WODS-ADA Series ADA Outdoor Shower



To specify fixture and options, use the Model Number and Options page.

Example: To specify a WODS-ADA outdoor shower with one-sided approach, 316 stainless steel body/cap/flange, in Yellow color

Use the following Willoughby Model Number: WODS-ADA-1A-316-Y

Recommended Specifications

Outdoor shower shall be Willoughby Model No. WODS-ADA- ...

Model **WODS-ADA** outdoor shower shall be vandal resistant with a 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Meets ADA reach and height requirements with one (1) standard shower head, one (1) shower head at ADA height, one (1) foot shower, two (2) grab bars, and three (3) push buttons for operating showers. Push button for ADA shower head is also at ADA height requirement.

Shower heads and foot showers shall be activated by recessed mounted solid stainless steel push button assemblies controlling lead-free metering and non-metering valves with 1.5 GPM flow. Shower unit is easily winterized by turning off the fixture supply line (shut-off valve by others), disconnecting the flexible supply hoses from the valves, and removing the valves from within the body; all valves are secured using a single-point attachment nut.


Shower heads and optional foot showers shall be Willoughby all-stainless steel (NPS) non-user adjustable shower heads.

Shower unit shall be factory assembled, tested for proper operation and ready for installation by a contractor. Unit to be anchored using 1/2"-13 anchoring bolts (by others).

Shower unit shall have a powder coat finish from the list of colors on the next page.

Optional marine-grade type 316 stainless steel body (main column, flange, and cap) is available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.

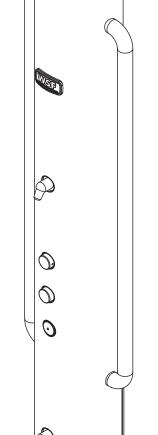

WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov



visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065


© Rev. 7/2023 WSF3-3


1.) Outdoo	or Show	er Type:			6.) Colors	s (select one):	
■ WODS	-ADA	Outdoor A	DA Shower		☐ SL	Silver	
					☐ G	Green	
2.) Approa	ach:				☐ R	Red	
□ 1A	One-si	ded Approach-	Both ADA and non-ADA showering	stations are on the	□ BL	Blue	
			same side of the shower column			Orange	
□ 2A	Two-sig	ded Approach*-	ADA and non-ADA showering station		\square \vee	Violet	
			opposite sides of the shower colum	n	☐ Y	Yellow	
					BR	Brown	
*NOTE:			will be placed on the same side as	i	□ BK	Black	
	the no	n-ADA shower	r head.		□ BE	Beige	
3.) Foot S	hower	-			□ W	White	
3.) FOOL 3	nowers.	No Foot Show	ore		YG	Yellow Green	
1		One (1) Foot S			☐ LBL	Light Blue	
<u> </u>		Two (2) Foot S			☐ GT	Graphite (Textured)	
		1110 (2) 1 001 0	310 110 110 110 110 110 110 110 110 110		■ MTW	Matte White	
4.) Flow R	ates:						
☐ 1.5 GP		dard)					
_		,					
5.) Option	s:						
316-0	os	316 Stainless	Steel Body For Outdoor Shower				
CAR-0	8-1	Surface Carrie	r For Outdoor Shower (Including mou	unting hardware)			
JF		Jug Filler					
☐ HBE		Hose Bibb Exp					
HBLD			se Bibb W/Lock Door				
☐ WSFM	K4	4 Bolt Hole Mo	ounting Kit (Not req'd with Carrier opti	on)			
Ann	(ad F-	r Manufast	uring Du		Data	Campari	
		r Manufactu			Date:	Company:	
I Wall T	hickne	SS:	Wall Typ	e:			



Å ADA COMPLIANCE

FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD, INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS ANDIOR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.

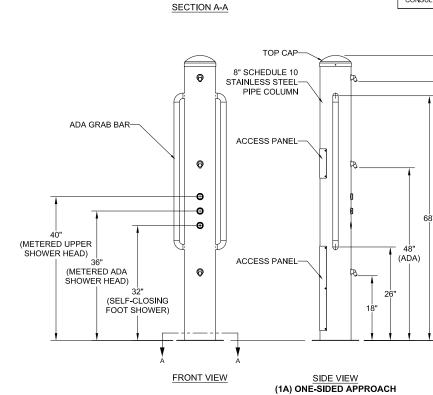

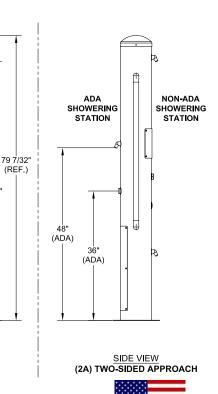

visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065



VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

WODFS Series Outdoor Foot Shower



To specify fixture and options, use the Model Number and Options page.

Example: To specify a WODFS outdoor foot shower with 2 foot shower heads, 1.0 GPM flow rate, 316 stainless steel body/cap/flange, in Silver color

Use the following Willoughby Model Number: WODFS-2-1.0-316-ODS-SL

Recommended Specifications

Outdoor Foot Shower shall be:
Willoughby Model No. **WODFS-__...**(Select from model number and options list on next page)

Model **WODFS** outdoor foot shower shall be vandal resistant with a 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Foot shower head(s) shall be activated by recessed mounted solid stainless steel push button assemblies controlling lead-free non-metering valves. Shower unit is easily winterized by turning off the fixture supply line (shut-off valve by others), disconnecting the flexible supply hoses from the valves, and removing the valves from within the body; all valves are secured using a single-point attachment nut.


Foot shower head(s) shall be Willoughby all-stainless steel (NPS) non-user adjustable shower heads.

Shower unit shall be factory assembled, tested for proper operation and ready for installation by a contractor. Unit to be anchored using 1/2"-13 anchoring bolts (by others).

Shower unit shall have a powder coat finish from the list of colors on page 2.

Optional marine-grade type 316 stainless steel body (main column, flange, and cap) is available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.

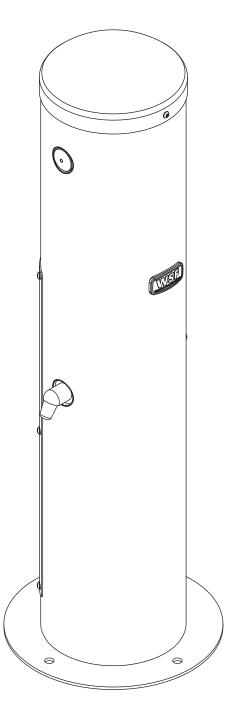




WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov



1.) Outdoor Sho	wer Type:	5.)	Colors	(select one):
■ WODFS	Outdoor Foot Shower		SL	Silver
			G	Green
2.) Foot Shower	s:		R	Red
1	Single (1) Foot Shower Head		BL	Blue
2	Dual (2) Foot Shower Heads		0	Orange
			V	Violet
3.) Flow Rates:			Υ	Yellow
■ 1.0 GPM (Sta	ndard)		BR	Brown
			BK	Black
4.) Options:			BE	Beige
☐ 316-ODS	316 Stainless Steel Body For Outdoor Shower		W	White
☐ HBE	Hose Bibb Exposed		YG	Yellow Green
☐ HBLD	Recessed Hose Bibb w/Lock Door		LBL	Light Blue
☐ JF	Jug Filler		GT	Graphite (Textured)
☐ CAR-08-1	Surface Carrier For Outdoor Shower (Including mounting hardwar	e) 🔲	MTW	Matte White
☐ WSFMK4	4 Bolt Hole Mounting Kit (Not reg'd with Carrier option)			

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

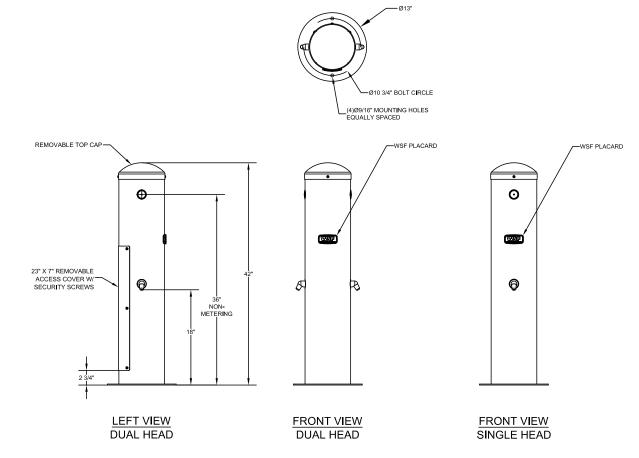


visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN

WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION

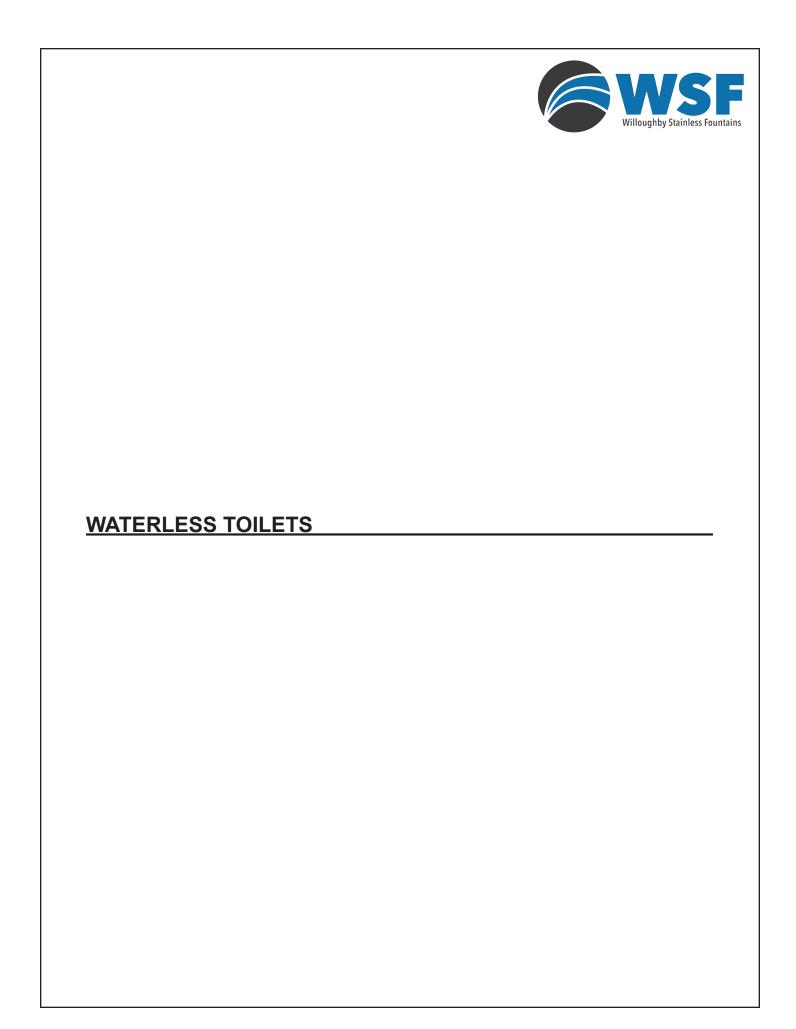



(Page Intentionally Left Blank)

WT-2016 Waterless Toilet





To specify fixture and options, use the Model Number and Options page.

Example: To specify a WT-2016 unit with a white hinged plastic seat: Use the following Willoughby Model Number: WT-2016-HS

Recommended Specifications

Waterless toilet shall be Willoughby Model No. WT-2016.

This unit is designed for use in parks, campgrounds, farms and wilderness areas where traditional waste systems are not available. Unit is designed for installation over vented pits. Fixture body shall be fabricated from 18 gauge type 304 stainless steel. Below floor extension is fabricated from 24 gauge type 304 stainless steel.

The construction shall be spot welded with exposed stainless surfaces polished to a #4 finish.

Waterless toilet shall include: 18 gauge stainless steel seat with piano hinge and 1 1/2" wide floor flange with 3/8" anchor holes. Anchoring hardware by others.






1.) Options:


☐ HS Hinged White Plastic Seat

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

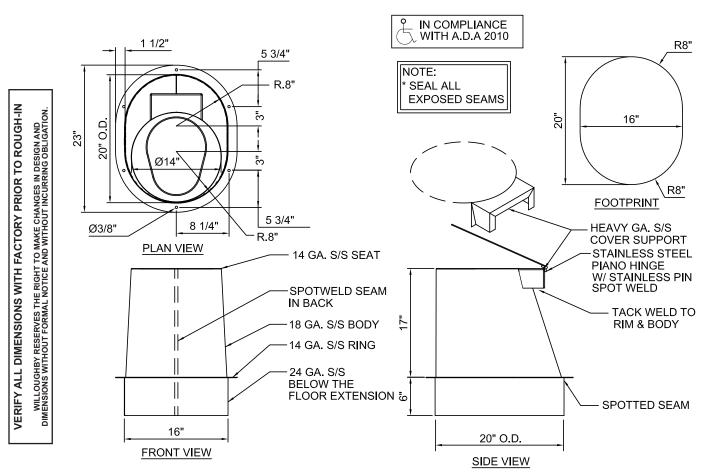

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268




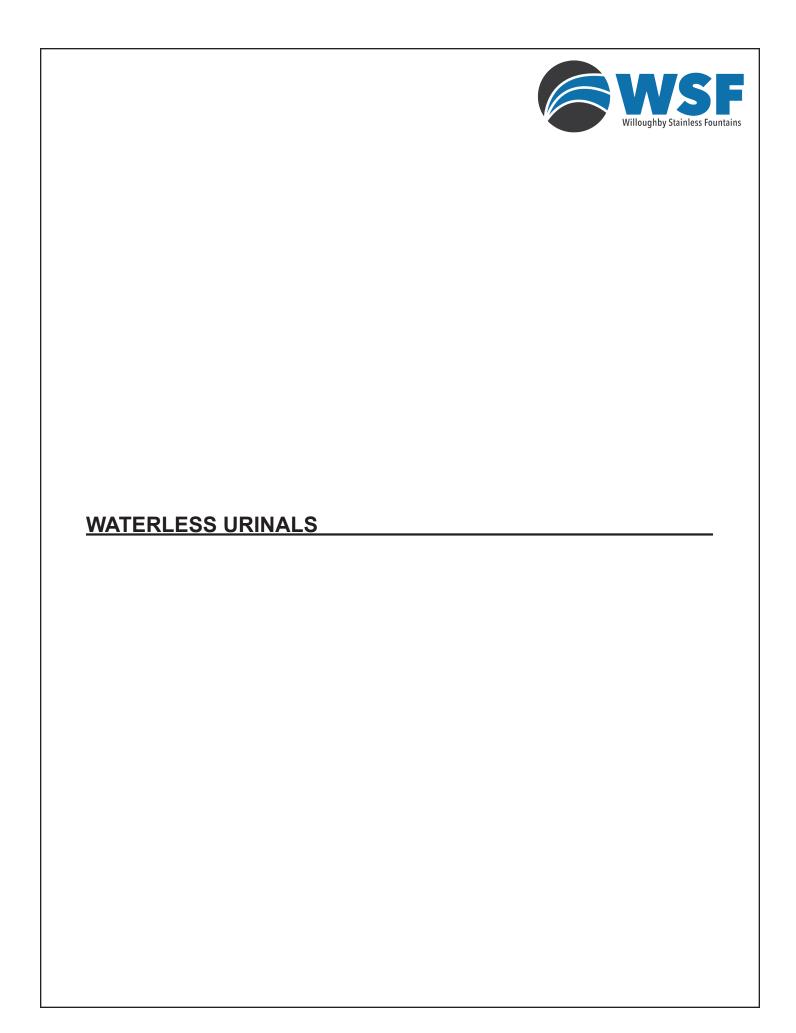



(Page Intentionally Left Blank)

WU-1010 Single Person Waterless Trough Urinal

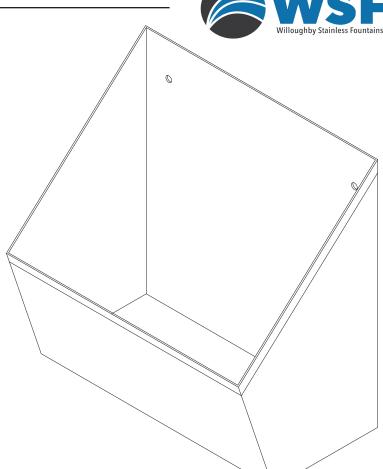

Recommended Specifications

Single Person Waterless Trough Urinal shall be: Willoughby Model No. **WU-1010** (Select from model number and options list on next page)

Fixture is fabricated from 16 GA., Type 304 stainless steel. The construction shall be all-welded with exposed stainless surfaces polished to a #3 satin finish.

Standard equipment shall include:

- Strainer with 1-1/2" M.P.T. pipe nipple

Anchoring shall be from the front, anchoring holes provided. Anchor hardware by others.


Unit requires no chase area for installation and maintenance.

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify a Single Person Waterless Trough Urinal

Use the following Willoughby Model Number:

WU-1010






1.) Base Model Number:


☐ WU-1010 Single Person Waterless Trough Urinal


Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

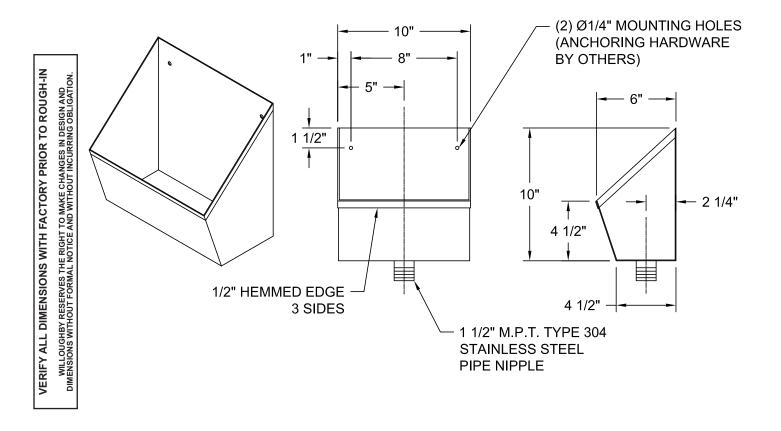







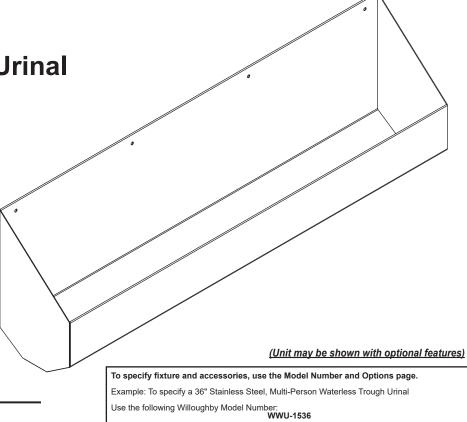

Recommended Specifications

Stainless Steel, Multi-Person Waterless Trough Urinal shall be: Willoughby Model No. **WWU-15___**(Select from model number and options list on next page)

Fixture is fabricated from 14 GA., Type 304 stainless steel. The construction shall be all-welded with exposed stainless surfaces polished to a #4 satin finish.

Standard equipment shall include:

- Beehive strainer with Ø1-1/2", 2" long tailpiece

Anchoring shall be from the front, anchoring holes provided. Anchor hardware by others.


Unit requires no chase area for installation and maintenance.

WARNING: Cancer and Reproductive Harm
- www.P65Warnings.ca.gov




1.) Base Model Number: ☐ WWU-1536 36" Stainless Steel, Multi-Person, Waterless Trough Urinal ■ WWU-1548 48" Stainless Steel, Multi-Person, Waterless " 60" Stainless Steel, Multi-Person, Waterless " ■ WWU-1560 ☐ WWU-1572 72" Stainless Steel, Multi-Person, Waterless " ■ WWU-1596 96" Stainless Steel, Multi-Person, Waterless " 2.) Options: ☐ BKSPL36 36" x 36" 14 GA. Stainless Steel Backsplash ■ BKSPL48 36" x 48" 14 GA. " 36" x 60" 14 GA. " ☐ BKSPL60 36" x 72" 14 GA. " ☐ BKSPL72 ☐ BKSPL96 36" x 96" 14 GA. " Other Other

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		

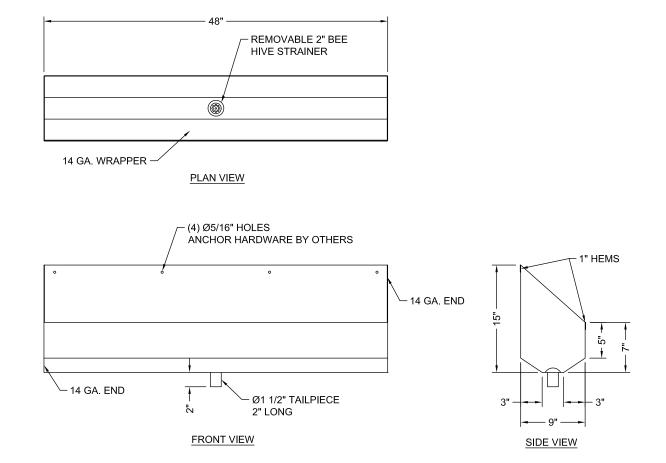

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065 MADE IN THE U.S.A.

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

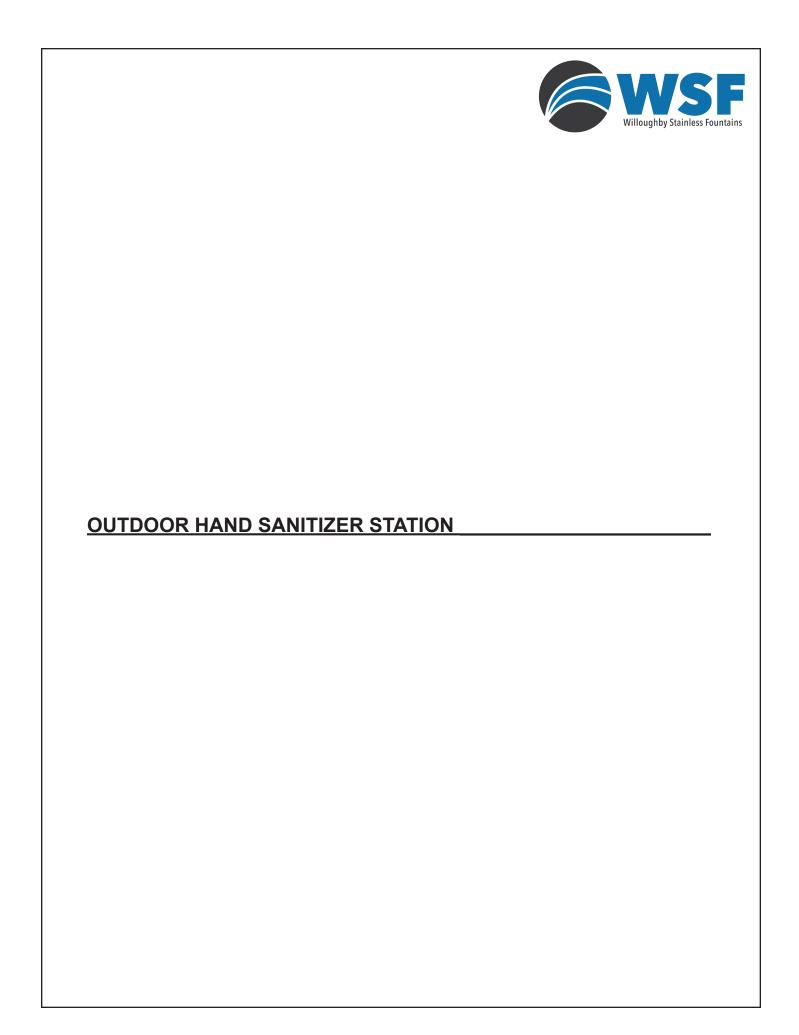



(Page Intentionally Left Blank)

WOHS Hand Sanitizer Station





To specify fixture and options, use the Model Number and Options page.

Example: To specify a WOHS-1 Single Hand Sanitizer Station in Silver color Use the following Willoughby Model Number: WOHS-1-SL

Recommended Specifications


Willoughby Model **WOHS-_** Hand Sanitizer Station is a vandal resistant Hand Sanitizer Station with Type 304 stainless steel 4-1/2" Schedule-40 main column and 7 GA. flange. Protective hinged sanitizer dispenser box is fabricated from 14 GA. stainless steel. A keyed lock in the top allows for easy access for sanitizer cartridge replacement.


Fixture uses industry standard and commercially available replacement cartridge.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.

Standard Features

- * Heavy duty Type 304 stainless steel 4-1/2" Schedule-40 main column and 7 GA. flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * Resistant to sunlight, heat, and vandalism
- * Hinged 14ga. sanitizer dispenser box
- * Powder coat finish (color options on page 2)
- * Unit is shipped with one cartridge of hand sanitizer







1.) Hand Sanitizer Station Type:

■ WOHS-1 Single Hand Sanitizer Station

■ WOHS-2 **Dual Hand Sanitizer Station**

2.) Colors (select one):

- ☐ SL Silver
- Green □ G
- \square R Red ☐ BL Blue
- Orange
- \square \vee Violet
- □ Y Yellow
- □ BR Brown
- □ BK Black
- □ BE Beige
- W White ☐ YG Yellow Green
- LBL Light Blue
- ☐ GT Graphite (Textured)

■ MTW Matte White


3.) Options:

316-1 316 Stainless Steel Body

■ WSFMK4

4 Bolt Hole Mounting Kit (Not reg'd with Carrier option) ☐ CAR-04-1 Surface Carrier, Single (Including mounting hardware)

Approved For Manufacturing By: _ Date: Company: Wall Thickness: _ Wall Type:

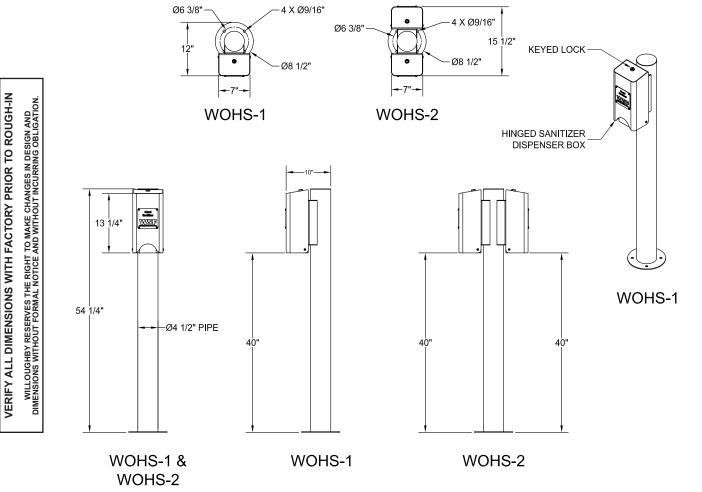

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street • Indianapolis, IN. 46268



WOHS-WM Wall mounted Hand Sanitizer Station





To specify fixture and options, use the Model Number and Options page.

Example: To specify a WOHS-WM Wall Mounted Hand Sanitizer Station in Silver color Use the following Willoughby Model Number: WOHS-WM-SL

Recommended Specifications

Willoughby Model **WOHS-WM** Wall Mounted Hand Sanitizer Station is a vandal resistant Hand Sanitizer Station with protective hinged sanitizer dispenser box is fabricated from 14 GA. stainless steel. A keyed lock in the top allows for easy access for sanitizer cartridge replacement. Mounting hardware by others.

Fixture uses industry standard and commercially available replacement cartridge.

Standard Features

- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * Resistant to sunlight, heat, and vandalism
- * Hinged 14ga. sanitizer dispenser box
- * Powder coat finish (color options on page 2)
- * Unit is shipped with one cartridge of hand sanitizer





1.) Hand Sanitizer Station Type:

■ WOHS-WM Wall Mounted, Hand Sanitizer Station

2.) Colors (select one):

☐ SL Silver

☐ G Green

Red

□ BL Blue□ O Orang

□ O Orange□ V Violet

Yellow

☐ BR Brown

BK Black

☐ BE Beige

☐ W White

☐ YG Yellow Green

☐ LBL Light Blue

☐ GT Graphite (Textured)


■ MTW Matte White


3.) Options:


☐ 316-1 316 Stainless Steel Body


Approved For Manufacturing By: ______ Date: _____ Company: _____ Wall Thickness: _____ Wall Type: _____

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.







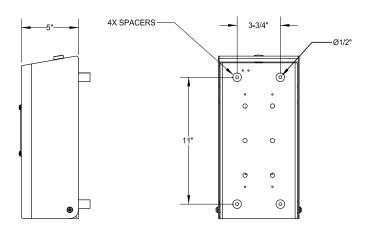

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065 MADE IN THE U.S.A.

© Rev. 10/2022





(Page Intentionally Left Blank)

WILDOWS Stainless Fountains

WODF-2FA Series Outdoor Drinking Fountain Front Approach

Recommended Specifications

Willoughby Model **WODF-2FA** outdoor drinking fountain, front approach is a dual-level, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange.

Fountain shall have high-polished, 18 GA. stainless steel bowls with anti-rotation, anti-squirt, solid stainless steel bubblers. Bubblers shall be activated by pedestal mounted solid stainless steel push button assemblies, which control lead-free, self-closing valves.

Push buttons shall require less than 5 lbs. of force to operate. Push buttons shall be adjustable to ensure adequate flow without being wasteful. **WODF-2FA** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSI A117.1. Fixtures in (HC) and (CHD) configurations shall meet American Disabilities Act of 2010 (ADA) compliance requirements.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.

WODF-2FA-HC


Standard Features

- * Adult ADA and Child (JR.) ADA compliant fixture configurations available
- * Heavy duty Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowls
- * Solid stainless steel, anti-rotation bubblers
- * Serviceable mesh strainer on inlet water supply
- * Heavy-duty main column access panel
- * Resistant to sunlight, heat and vandalism
- * Stainless steel adjustable push buttons
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WODF-2FA outdoor drinking fountain with Child-height (JR. ADA) bowl, in Green color

Use the following Willoughby Model Number: WODF-2FA-CHD-G



WODF-2FA-CHD



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov





visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

1.) Outdoor Drinking Fountain Type:		4.) Colors (select one):		
■ WODF-2FA	Two-bowl Outdoor Drinking Fountain, Front Approach	☐ SL	Silver	
		🔲 G	Green	
2.) Bowl Height (other than main column bowl):		🔲 R	Red	
☐ HC	Adult ADA Compliant	BL	Blue	
☐ CHD	Child (JR. ADA Compliant)		Orange	
		□ ∨	Violet	
3.) Options:		☐ Y	Yellow	
316-2	316 Stainless Steel Body, Double	BR	Brown	
☐ CAR-10-1	Surface Carrier, Single (Including mounting hardware)	BK	Black	
☐ SOV	Shut Off Valve	BE	Beige	
☐ SCV	Seasonal Bowl Covers (2)	□ W	White	
☐ JF/FW	Jug Filler / Foot Wash	YG	Yellow Green	
☐ HBE	Hose Bibb Exposed	LBL	Light Blue	
☐ HBLD	Recessed Hose Bibb w/ Lock Door	☐ GT	Graphite (Textured)	
☐ HH	Hose / Leash Hanger	■ MTW	Matte White	
■ WSFMK4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)			

Approved For Manufacturing By: _ Date: _ Company: Wall Thickness: . Wall Type:





WODF-2-HC


WODF-2-CHD



ADA COMPLIANCE

FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD. INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.

Note: Access panel is on back side of unit.




WODF-2-HC & WODF-2-CHD



VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

WODF-3FA Series Outdoor Drinking Fountain Front Approach





WODF-3FA-HC-CHD


Recommended Specifications

Willoughby Model **WODF-3FA** outdoor drinking fountain, front approach is a triple-level, vandal resistant drinking fountain with Type 304 stainless steel 10" Schedule-10 main column and 7 GA. flange.

Fountain shall have high-polished, 18 GA. stainless steel bowls with anti-rotation, anti-squirt, solid stainless steel bubblers. Bubblers shall be activated by pedestal mounted solid stainless steel push button assemblies, which control lead-free, self-closing valves.

Push buttons shall require less than 5 lbs. of force to operate. Push buttons shall be adjustable to ensure adequate flow without being wasteful. **WODF-3FA** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSIA117.1. Fixtures in (HC) and (CHD) configurations shall meet American Disabilities Act of 2010 (ADA) compliance requirements.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.




Standard Features

- * Adult ADA and Child (JR.) ADA compliant fixture configurations available
- * Heavy duty Type 304 stainless steel 10" Schedule-10 main column and 7 GA, flange
- * Optional marine-grade Type 316 stainless steel body for installations near salt water
- * High polished stainless steel bowls
- * Solid stainless steel, anti-rotation bubblers
- * Serviceable mesh strainer on inlet water supply
- * Heavy-duty main column access panel
- * Resistant to sunlight, heat and vandalism
- * Stainless steel adjustable push buttons
- * Powder coat finish (color options on page 2)

To specify fixture and color, use the Model Number and Options Guide.

Example: To specify a WODF-3FA outdoor drinking fountain with Adult ADA and Child-height (JR. ADA) bowls, in Red color

Use the following Willoughby Model Number: WODF-3FA-HC-CHD-R



WODF-3FA-CHD-PET (REAR PET LOCATION)

WARNING: Cancer and Reproductive Harm
- www.P65Warnings.ca.gov

visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065




© Rev. 12/2023 WSF7-3

1.) Outdoor Drinking Fountain Type:		4.) Colors (select one):		
■ WODF-3FA	Three-bowl Outdoor Drinking Fountain, Front Approach	☐ SL Silver		
		☐ G Green		
2.) Bowl Height (c) HC CHD PET 3.) Options: 316-3 CAR-10-1 CAR-10-2 SOV SCV JF/FW Jug Fille HBE HBLD	Adult ADA Compliant Child (JR. ADA Compliant) Pet Bowl Side Rear 316 Stainless Steel Body, Triple Surface Carrier, Single (Including mounting hardware) Surface Carrier, Double, Used With Pet Bowl Only (Including mounting hardware) Shut Off Valve Seasonal Bowl Covers (3) Per / Foot Wash Hose Bibb Exposed Recessed Hose Bibb W/Lock Door	G Green R Red BL Blue O Orange V Violet Y Yellow BR Brown BK Black BE Beige W White YG Yellow Green LBL Light Blue GT Graphite (Textured) MTW Matte White		
☐ HH☐ WSFMK4☐ WSFMK6	Hose / Leash Hanger 4 Bolt Hole Mounting Kit (Not req'd with Carrier option) 6 Bolt Hole Mounting Kit, Used With Pet Bowl Only (Not req'd with Carrier option)			
	Manufacturing By:	_ Date: Company:		

Wall Thickness: Wall Type:




VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN

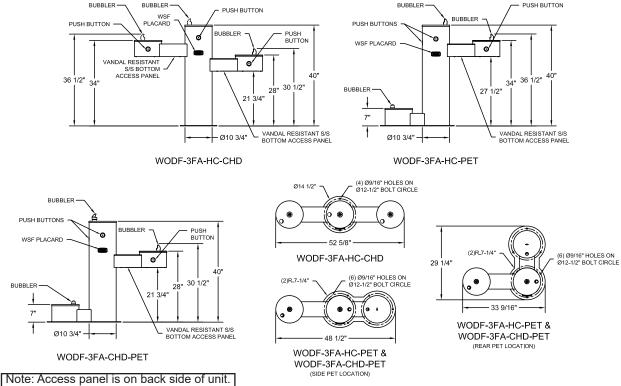

ADA COMPLIANCE

FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD, INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.



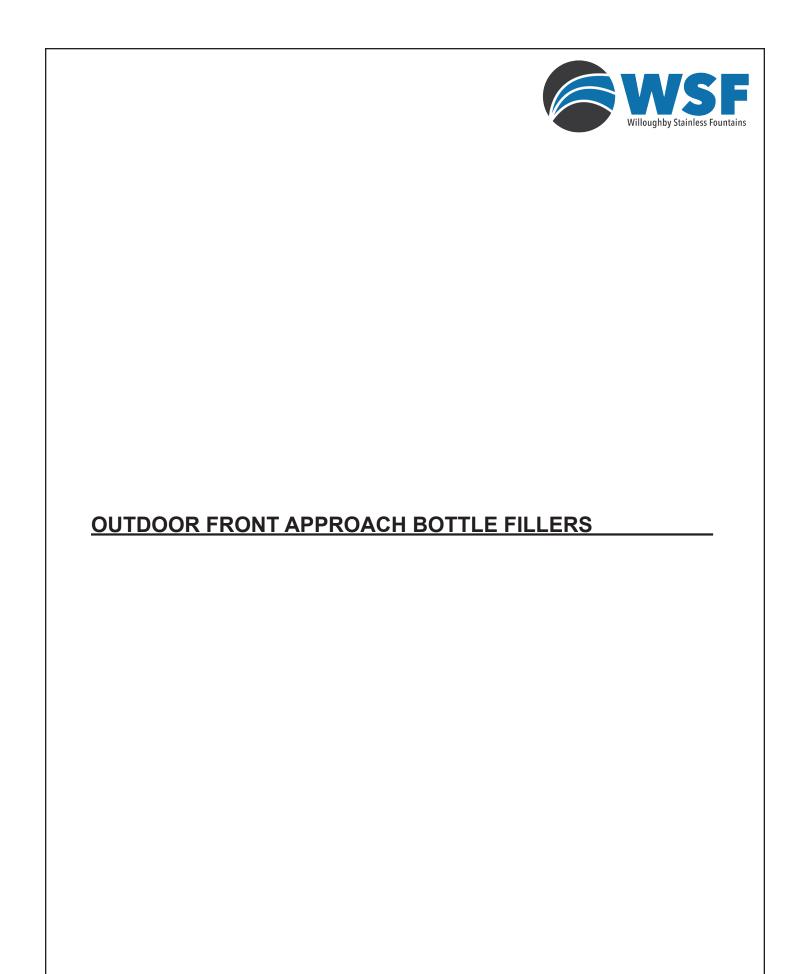



(Page Intentionally Left Blank)



CWBF-2FA Series Outdoor Bottle Filler Front Approach w/Drinking Fountain


To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-2FA outdoor bottle filler with drinking fountain with recessed pushbutton, child drinking fountain bowl height, and 316 stainless steel body/cap/flange in Blue color,

Use the following Willoughby Model Number: CWBF-2FA-RPB-CHD-316-BL

Standard Features

- * Adult and Child A.D.A. compliant
- * Compliant to ADA reach height guidelines
- * Quick, 1-gallon-per-minute bottle fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation bottle filler spout
- * Solid stainless steel, anti-rotation drinking fountain bubbler
- * High polished stainless steel bowl
- * Replaceable in-line charcoal filter on inlet water supply
- * Heavy-duty main column access panels
- * Resistant to sunlight, heat, and vandalism
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Powder coat finish (color options on page 2)



CWBF-2FA-RPB-HC

Recommended Specifications

Outdoor bottle filler, front approach, with drinking fountain shall be Willoughby Model No. **CWBF-2FA-** (see Model Number and Options guide for actuator selection).

Model **CWBF-2FA** outdoor bottle filler, front approach, with drinking fountain shall be a dual-level, vandal resistant drinking fountain with 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Bottle filler spout and fountain bubbler shall be activated by separate recessed mounted solid stainless steel pushbutton assemblies (optional battery operated infrared activation available for bottle filler spout).

Drinking fountain shall have high-polished, 18 gauge stainless steel bowl with antirotation, anti-squirt, solid stainless steel bubblers.

All pushbuttons control lead-free, self-closing valves. Pushbutton operation shall require less than 5 lbs. of force.

Flow controls are used to ensure adequate flow without being wasteful. Bottle filler flows 1.0 GPM, drinking fountain flows 0.5 GPM.

Model **CWBF-2FA** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSI A117.1 and American Disabilities Act of 2010 requirements.

Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.



CWBF-2FA-RPB-CHD



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov



visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065

© Rev. 5/2023 WSF8-1

1.) Outdoor Bottle Filler Type:

☐ CWBF-2FA 1 Outdoor Bottle Filler, Front Approach,

and 1 Drinking Fountain Bowl

2.) Bottle Filler Actuator Options (select one):

☐ RPB Recessed Push Button

■ BO Battery Operated Infrared Sensor

3.) Drinking Fountain Bowl Height (select one):

☐ HC Adult A.D.A.☐ CHD Child

4.) Options:

316-2 316 Stainless Steel Body, Double

□ CAR-10-1 Surface Carrier, Single (Including mounting hardware)

□ JF/FW Jug Filler / Foot Wash□ HBE Hose Bibb Exposed

☐ HBLD Recessed Hose Bibb W/Lock Door

☐ HH Hose / Leash Hanger☐ SOV Shut Off Valve


☐ SCV Seasonal Bowl Cover (1)

☐ WSFMK4 4 Bolt Hole Mounting Kit (Not req'd with Carrier option)

5.) Colors (select one):

- ☐ SL Silver
- G Green
- ☐ R Red Blue
- ☐ O Orange
- V Violet
- Yellow
- □ BR Brown□ BK Black
- BE Beige
- W WhiteYG Yellow G
- ☐ YG Yellow Green
 ☐ LBL Light Blue
- ☐ GT Graphite (Textured)
- MTW Matte White


Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		. ,

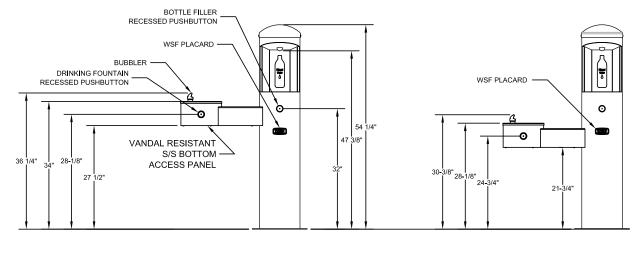

CWBF-2-RPB-HC

CWBF-2-RPB-CHD

Note: Access panel is on back side of unit.



Ł

ADA COMPLIANCE

FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD. INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.

visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN

WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION



CWBF-3FA Series Outdoor Bottle Filler Front Approach w/Drinking Fountain

To specify fixture and options, use the Model Number and Options page.

Example: To specify a CWBF-3FA outdoor bottle filler with drinking fountain with recessed pushbutton, child drinking fountain bowl height, pet drinking fountain, and 316 stainless steel body/cap/flange in Blue color,

Use the following Willoughby Model Number: CWBF-3FA-RPB-CHD-PET-316-BL

Standard Features

- * Adult and Child A.D.A. compliant
- * Compliant to ADA reach height guidelines
- * Quick, 1-gallon-per-minute bottle fill rate
- * One-piece fully-welded construction
- * Standard heavy duty type 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange
- * Optional marine-grade type 316 stainless steel body for installations near salt water
- * Solid stainless steel vandal resistant anti-rotation bottle filler spout
- * Solid stainless steel, anti-rotation drinking fountain bubbler
- * High polished stainless steel bowl
- * Replaceable in-line charcoal filter on inlet water supply
- * Heavy-duty main column access panels
- * Resistant to sunlight, heat, and vandalism
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Powder coat finish (color options on page 2)

Recommended Specifications

Outdoor bottle filler, front approach, with drinking fountain shall be Willoughby Model No. **CWBF-3FA-**____ (see Model Number and Options guide for actuator selection).

Model **CWBF-3FA** outdoor bottle filler, front approach, with drinking fountain shall be a triple-level, vandal resistant drinking fountain with 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Bottle filler spout and fountain bubbler shall be activated by separate recessed mounted solid stainless steel pushbutton assemblies (optional battery operated infrared activation available for bottle filler spout).

Drinking fountain shall have high-polished, 18 gauge stainless steel bowl with anti-rotation, anti-squirt, solid stainless steel bubblers.


All pushbuttons control lead-free, self-closing valves. Pushbutton operation shall require less than 5 lbs. of force.

Flow controls are used to ensure adequate flow without being wasteful. Bottle filler flows 1.0 GPM, drinking fountain flows 0.5 GPM.


Model **CWBF-3FA** fountain shall be lead-free, adhering to ANSI/NSF 61, Section 9, ANSI A117.1 and American Disabilities Act of 2010 requirements.


Optional 316 stainless steel body (main column, flange, and cap) are available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.



CWBF-3FA-HC-SAH





WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov




visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

© Rev. 12/2023 WSF8-3

1.) Outdoor Bottle Filler Type:			[Options CONTINUED:]		
CWBF-3FA	1 Outdoor Bottle Filler, Front Approach,	SOV	Shut Off Valve		
	and 2 Drinking Fountain Bowls	□ SCV	Seasonal Bowl Covers (2)		
		■ WSFMK4	4 Bolt Hole Mounting Kit (Not req'd with Carrier option)		
2.) Bottle Filler Actuator Options (select one):		■ WSFMK6	6 Bolt Hole Mounting Kit , Used With Pet Bowl Only		
□ RPB	Recessed Push Button		(Not req'd with Carrier option)		
□ во	Battery Operated Infrared Sensor		, ,		
		5.) Colors (se	elect one):		
3.) Drinking Fou	ntain Bowl Height (select two):	☐ SL	Silver		
☐ HC	Adult A.D.A.	G G	Green		
☐ SAH	Standing Adult (38" Rim Height)	☐ R	Red		
☐ CHD	Child	□ BL	Blue		
□ PET	Pet Bowl	□ 0	Orange		
	☐ Side ☐ Rear	□ ∨	Violet		
		□ Y	Yellow		
4.) Options:		■ BR	Brown		
316-3	316 Stainless Steel Body, Triple	□ BK	Black		
CAR-10-1	Surface Carrier, Single (Including mounting hardware)	■ BE	Beige		
CAR-10-2	Surface Carrier, Double , Used With Pet Bowl Only	□ W	White		
	(Including mounting hardware)	☐ YG	Yellow Green		
☐ JF/FW	Jug Filler / Foot Wash	□ LBL	Light Blue		
☐ HBE	Hose Bibb Exposed	□ GT	Graphite (Textured)		
HBLD	Recessed Hose Bibb W/Lock Door	■ MTW	Matte White		
□ HH	Hose / Leash Hanger				
	[CONTINUED IN NEXT COLUMN:]				
Approved For Manufacturing By: Date: Company:					
Wall Thickness: Wall Type:					

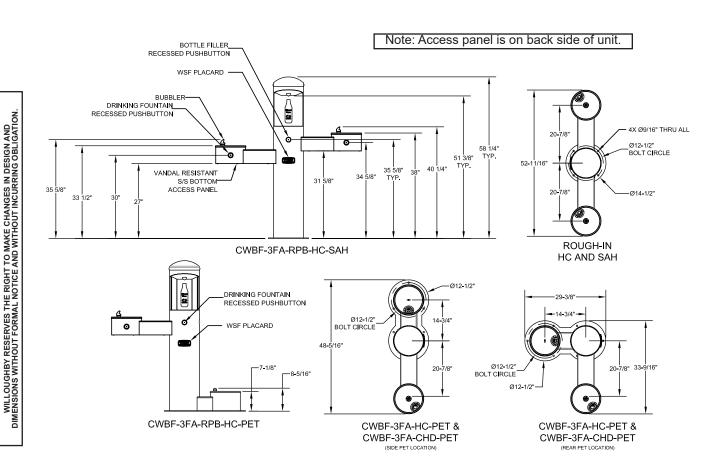

visit our website at www.willoughbystainlessfountains.com

5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065



VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN