
Willoughby Stainless Fountains

WOBF-1RFM Series Stainless Steel Recessed Front Mounted Bottle Filler




Stainless Steel, Recessed Front Mounted, Bottle Filler shall be: Willoughby Model No. **WOBF-1RFM**.

Model **WOBF-1RFM** bottle filler shall be constructed of a vandal resistant 304 stainless steel, with a removable bottom panel.

Filler spout shall be activated by a solid stainless steel pushbutton assembly which controls a lead-free, self-closing valve. Pushbutton operation shall require less than 5 lbs. of force to activate.

Model **WOBF-1RFM** bottle filler shall be lead-free and in compliance with ANSI/NSF 61, Section 9 requirements.

Anchoring shall be by z-clip at the top of the fixture and internal wall mounting holes at the bottom of the fixture. Anchoring hardware is to be provided by others.

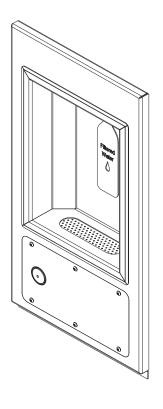

Recommended Specifications

To specify fixture and options, use the Model Number and Options page.

Example: To specify a WOBF-1RFM recessed front mounted bottle filler with single temp nonmetering valve, recessed pushbutton, and in Silver color.

Use the following Willoughby Model Number: WOBF-1RFM-RPB-SL

- * Simple, vandal-resistant pushbutton
- * Quick, 1-gallon-per-minute fill rate
- * Standard heavy duty type 304 14 Ga. stainless steel
- * Solid stainless steel vandal resistant anti-rotation filler spout
- * Replaceable in-line charcoal filter on inlet water supply
- * Promotes use of environmentally friendly refillable bottles, reducing use of disposable bottles
- * Compliant to ADA reach height guidelines
- * Removable bottom panel
- * Powder coat finish (color options on page 2)




WARNING: Cancer and Reproductive Harm


- www.P65Warnings.ca.gov

MADE IN THE U.S.A.

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065



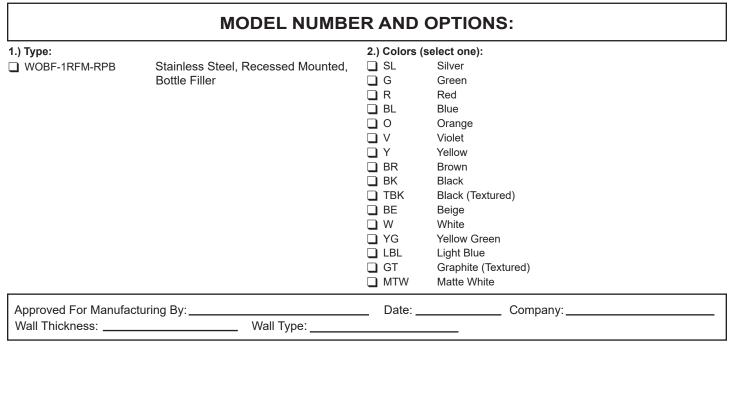

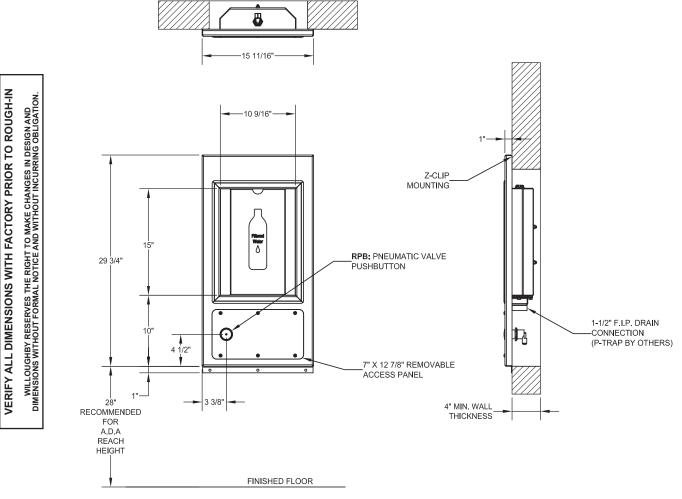



visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065