## Willoughby Stainless Fountains

## WODS-ADA Series ADA Outdoor Shower



To specify fixture and options, use the Model Number and Options page.

Example: To specify a WODS-ADA outdoor shower with one-sided approach, 316 stainless steel body/cap/flange, in Yellow color

Use the following Willoughby Model Number: WODS-ADA-1A-316-Y

## **Recommended Specifications**

Outdoor shower shall be Willoughby Model No. WODS-ADA- ...

Model **WODS-ADA** outdoor shower shall be vandal resistant with a 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Meets ADA reach and height requirements with one (1) standard shower head, one (1) shower head at ADA height, one (1) foot shower, two (2) grab bars, and three (3) push buttons for operating showers. Push button for ADA shower head is also at ADA height requirement.

Shower heads and foot showers shall be activated by recessed mounted solid stainless steel push button assemblies controlling lead-free metering and non-metering valves with 1.5 GPM flow. Shower unit is easily winterized by turning off the fixture supply line (shut-off valve by others), disconnecting the flexible supply hoses from the valves, and removing the valves from within the body; all valves are secured using a single-point attachment nut.

Shower heads and optional foot showers shall be Willoughby all-stainless steel (NPS) non-user adjustable shower heads.


Shower unit shall be factory assembled, tested for proper operation and ready for installation by a contractor. Unit to be anchored using 1/2"-13 anchoring bolts (by others).


Shower unit shall have a powder coat finish from the list of colors on the next page.

Optional marine-grade type 316 stainless steel body (main column, flange, and cap) is available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.



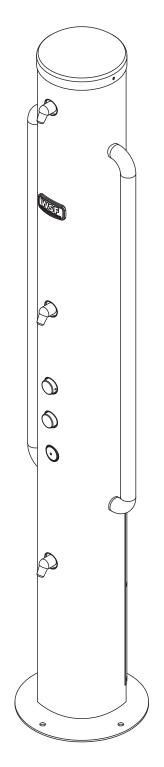



- www.P65Warnings.ca.gov




visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

© Rev. 9/2024 WSF3-3

## **MODEL NUMBER AND OPTIONS:**

1.) Outdoor Shower Type:		6.) Colors (select one):		
■ WODS-ADA Outdoor ADA Shower		☐ SL	Silver	
		🔲 G	Green	
2.) Approach:		☐ R	Red	
☐ 1A One-sided A	sided Approach- Both ADA and non-ADA showering stations are on the same side of the shower column	□ BL	Blue	
			Orange	
☐ 2A <u>Two-sided A</u>	pproach*- ADA and non-ADA showering stations are on	☐ V	Violet	
	opposite sides of the shower column	☐ Y	Yellow	
		BR	Brown	
	er station will be placed on the same side as	BK	Black	
the non-AD	A shower head.	TBK	Black (Textured)	
3.) Foot Showers:		□ BE	Beige	
0 No Foot Showers		□ W	White	
	(1) Foot Shower	YG	Yellow Green	
	(2) Foot Showers	☐ LBL	Light Blue	
(2) 1 oot chomolo		☐ GT	Graphite (Textured)	
4.) Flow Rates:		■ MTW	Matte White	
1.5 GPM (Standard)				
5.) Options:				
☐ 316-ODS 316 Stainless Steel Body For Outdoor Shower				
☐ CAR-08-1 Surface Carrier For Outdoor Shower (Including mounting hardware)				
☐ JF Jug F	Filler			
_	Bibb Exposed			
_	essed Hose Bibb W/Lock Door			
☐ WSFMK4 4 Bo	It Hole Mounting Kit (Not req'd with Carrier option)			
Approved For Manufacturing By:		Date:	Company:	
Wall Thickness: Wall Type:		Date	Company	




ADA COMPLIANCE

FIXTURE COMPLIES WITH ADA ACCESSIBILITY REQUIREMENTS WHEN INSTALLED ACCORDING TO THE STANDARD, INSTALLATION MAY REQUIRE ADDITIONAL FIXTURES, COMPONENTS AND/OR CONSTRUCTION FEATURES TO BE FULLY COMPLAINT. CONSULT THE LOCAL CODE AUTHORITY IF NEEDED.

WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN

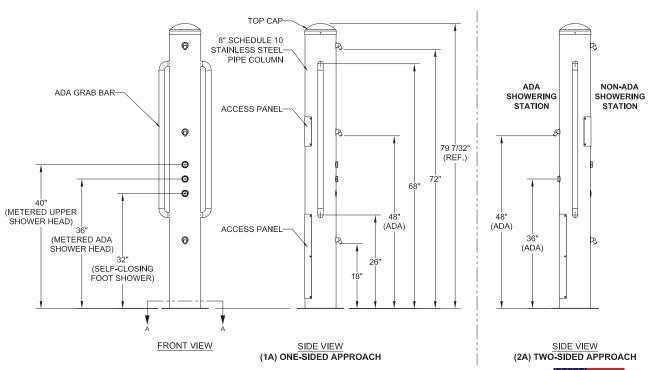

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street • Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

