Willoughby Stainless Fountains





To specify fixture and options	, use the Model Number and Options page.
--------------------------------	--

Example: To specify a WODS outdoor shower with 4 shower heads, 1 foot shower, 316 stainless steel body / cap / flange, in Violet color

Use the following Willoughby Model Number: WODS-4-1-316-V

1	MODEL NUMBER	SHOWER HEADS	FOOT SHOWERS
	WODS-1-0	1	0
	WODS-1-1	1	1
	WODS-2-0	2	0
	WODS-2-1	2	1
	WODS-2-2	2	2
	WODS-4-0	4	0
	WODS-4-1	4	1
	WODS-4-2	4	2

Recommended Specifications

Outdoor shower shall be Willoughby Model No. **WODS-__-** (select number of shower heads and foot showers from table above).

Model **WODS** outdoor shower shall be vandal resistant with a 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Shower heads and foot showers shall be activated by recessed mounted solid stainless steel push button assemblies controlling lead-free metering and non-metering valves with 1.5 GPM flow. Shower unit is easily winterized by turning off the fixture supply line (shut-off valve by others), disconnecting the flexible supply hoses from the valves, and removing the valves from within the body; all valves are secured using a single-point attachment nut.


Shower heads and optional foot showers shall be Willoughby all-stainless steel (NPS) non-user adjustable shower heads.

Shower unit shall be factory assembled, tested for proper operation and ready for installation by a contractor. Unit to be anchored using 1/2"-13 anchoring bolts (by others).

Shower unit shall have a powder coat finish from the list of colors on the next page.

Optional marine-grade type 316 stainless steel body (main column, flange, and cap) is available for applications in which the unit's exterior may come into contact with salt water.

Optional mounting kit available for purchase consisting of stainless steel anchors, nuts, washers and rubber gasket washers. If optional kit is not used, stainless steel hardware recommended.





WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov



MODEL NUMBER AND OPTIONS:


1.) Outdoor Sh	ower Type:	6.) Colors	(select one):
■ WODS	Outdoor Shower	☐ SL	Silver
		🔲 G	Green
2.) Head Showers:		☐ R	Red
1	One (1) Head Shower	☐ BL	Blue
2	Two (2) Head Showers	 0	Orange
_ 4 I	Four (4) Head Showers	□ ∨	Violet
		□ Y	Yellow
3.) Foot Showers:		■ BR	Brown
0	No Foot Showers	□ BK	Black
1	One (1) Foot Shower	□ TBK	Black (Textured)
2	Two (2) Foot Showers	☐ BE	Beige
		□ W	White
4.) Flow Rates:		YG	Yellow Green
1.5 GPM (Standard)		LBL	Light Blue
·	·	☐ GT	Graphite (Textured)
5.) Options:		■ MTW	Matte White
☐ 316-ODS	316 Stainless Steel Body For Outdoor Shower		
☐ HBE	Hose Bibb Exposed		
— □ HBLD	Recessed Hose Bibb w/Lock Door		

Surface Carrier For Outdoor Shower (Including mounting hardware)

-Ø8-5/8"

4 Bolt Hole Mounting Kit (Not req'd with Carrier option)

Approved For Manufacturing By:		Date:	Company:
Wall Thickness:	Wall Type:		. ,

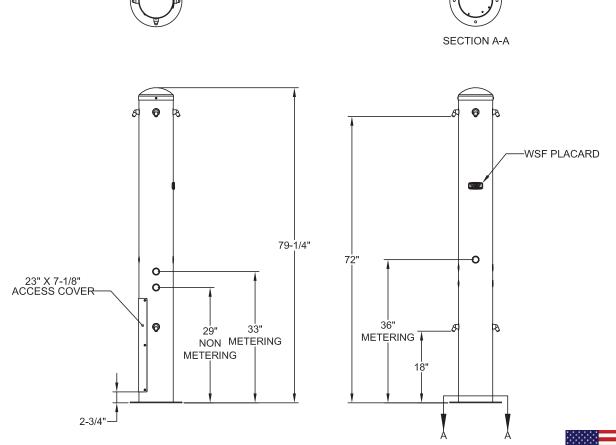

visit our website at www.willoughbystainlessfountains.com 5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

4XØ 9/16" THRU ALL -HOLES ON Ø 10¾" BOLT CIRCLE

☐ JF

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

☐ CAR-08-1

☐ WSFMK4

Jug Filler

Ø13"